

**V-TAC<sup>®</sup>**  
**INNOVATIVE LED LIGHTING**

**SCHRACK**  
**TECHNIK**



# 2021 Catalogue

**V-TAC<sup>®</sup>**  
**PRO**

**SAMSUNG  
 LED**  
 Illuminated



**5 YEAR  
 WARRANTY**



**ONLINE SHOPPING!**

In the office or on the road with the Live Phone App

**AVAILABILITY INFORMATION**

Check availabilities in your Schrack Technik Online Shop

## TABLE OF CONTENTS

LED Table Lamps



page 3

LED Linear lights



page 4

Recessed Spots




page 10

LED Panels



page 16

Batten Luminaires - Linkable



page 28

Grill Fitting



page 30

Waterproof Luminaires



page 32

LED Floodlights



page 36

LED Linear High Bays



page 50

LED Strip Lights



page 52

Source of Light & Accessories



page 62





# LED Table Lamps

Most cozy & favorite corners always deserve comfortable lighting conditions. To cater to this need, we bring to you an exclusive range of LED table lamps. Designed with a touch of class, these lamps deliver sufficient and smooth lighting, with unique and suitable functions for both task and ambient lighting.

## Applications

Table lamps can be used in any space, though they are most often found in bedrooms, living rooms at

home next to sofas, chairs or beds. Also a good accessory to be a part of the office decor.

## Product Features

- Energy efficient lighting
- Easily adjustable for your convenience
- Multiple functions like dimming, color changing, and more
- With USB charging functionality
- Sleek and modern design

## Table Lamps

**17W**  
VT-7312



EAN Code 3800157648455 3000K  
3800157648462 3000K

DESCRIPTION	ORDER NO.
17W-LED DESIGNER TABLE LAMP WITH EU PLUG CORD+SWITCH -BLACK-3000K	LIVT40311
17W-LED DESIGNER TABLE LAMP WITH EU PLUG CORD+SWITCH -WHITE-3000K	LIVT40321

Voltage/Frequency:	AC: 100-240V, 50/60Hz	Beam Angle:	120°
Luminous Flux:	1300 lm	Body Type:	Aluminium, Silicon
IP Rating:	IP20	Dimension:	210 x 350 mm
CRI:	>80		

## Table Lamps

**5W**  
VT-7405



- WIRELESS CHARGING
- ANDROID & IPHONE
- BRIGHTNESS ADJUSTABLE
- ENERGY CONSERVATION
- EYE PROTECTION
- TIMER POWER OFF
- USB OUTPUT
- LIGHTING ADJUSTMENT

**3.0A 18W**  
Fast Charger  
Included

EAN Code 3800157650533 2700K~6500K  
3800157650540 2700K~6500K

DESCRIPTION	ORDER NO.
5W-LED TABLE LAMP WITH WIRELESS CHARGER- BLACK-2700K~6500K WITH ADAPTOR	LIVT8600
5W-LED TABLE LAMP WITH WIRELESS CHARGER- WHITE-2700K~6500K WITH ADAPTOR	LIVT8601

Voltage/Frequency:	AC: 100-240V, 50/60Hz	Body Type:	ABS, Aluminium
Luminous Flux:	800 lm	Dimension:	440 x 120 x 40 mm
IP Rating:	IP20	Light color:	3 in 1
CRI:	>80		



# LED Linear lights

V-TAC LED Linear Lights are an energy efficient, low maintenance alternative to traditional linear fluorescent in a variety of industrial, commercial, and light assembly applications. It is the optimal solution for conventional lighting systems and excellent for new installations due to its low installation cost.

## **Applications**

Ideal for lighting applications in residential, commercial, and hospitality locations.

## **Key Features**

- Saves 80% energy
- No Ultraviolet or Infrared Rays
- Totally flexible, Compact & Adjustable design
- No Lead or Mercury content hence environment friendly
- Provides Uniform Radiance & Enhances appeal of any environment
- Continuous row modular system

## Linear Hanging Lights




40W  
VT-7-43

**LINKABLE**  
UP TO 12 METERS TOGETHER

**5 YEAR WARRANTY**

**0-10V DIMMABLE**



EAN Code 3800157638579 4000K  
3800157639927 4000K



Box Qty.  
**12 Pcs**

DESCRIPTION	ORDER NO.
LED Linear Light SAMSUNG CHIP - 40W Hanging Suspension White Body 4000K 1200x50x65mm	LIVTS383
LED Linear Light SAMSUNG CHIP - 40W Hanging Suspension Silver Body 4000K 1200x50x65mm	LIVTS384

Voltage/Frequency:	AC: 200-240V, 50Hz	PF:	>0.9
Luminous Flux:	3400 lm	Beam Angle:	120°
IP Rating:	IP20	Body Type:	Aluminium
CRI:	>80	Dimension:	1200 x 50 x 65 mm

## Linear Hanging Light



40W  
VT-7-40

**5 YEAR WARRANTY**



EAN Code 3800157644983 3000K



Box Qty.  
**8 Pcs**

EAN Code 3800157638487 4000K  
3800157638494 4000K  
3800157638500 4000K



Box Qty.  
**12 Pcs**

DESCRIPTION	ORDER NO.
40W-LED LINEAR HANGING SUSPENSION LIGHT- BLACK BODY-LED BY SAMSUNG-3000K	LIVTS882

DESCRIPTION	ORDER NO.
LED Linear Light SAMSUNG CHIP - 40W Hanging Suspension Black Body 4000K 1200x35x67mm	LIVTS374
LED Linear Light SAMSUNG CHIP - 40W Hanging Suspension Silver Body 4000K 1200x35x67mm	LIVTS375
LED Linear Light SAMSUNG CHIP - 40W Hanging Suspension White Body 4000K 1200x35x67mm	LIVTS376


Voltage/Frequency:	AC: 220-240V, 50Hz	PF:	>0.9
Luminous Flux:	3800 lm	Beam Angle:	120°
IP Rating:	IP20	Body Type:	Aluminium
CRI:	>80	Dimension:	1200 x 35 x 67mm

Voltage/Frequency:	AC: 220-240V, 50Hz	PF:	>0.9
Luminous Flux:	4000 lm	Beam Angle:	120°
IP Rating:	IP20	Body Type:	Aluminium
CRI:	>80	Dimension:	1193 x 35 x 67 mm




## Linear Hanging Light - Non Linkable


**60W**  
VT-7-61

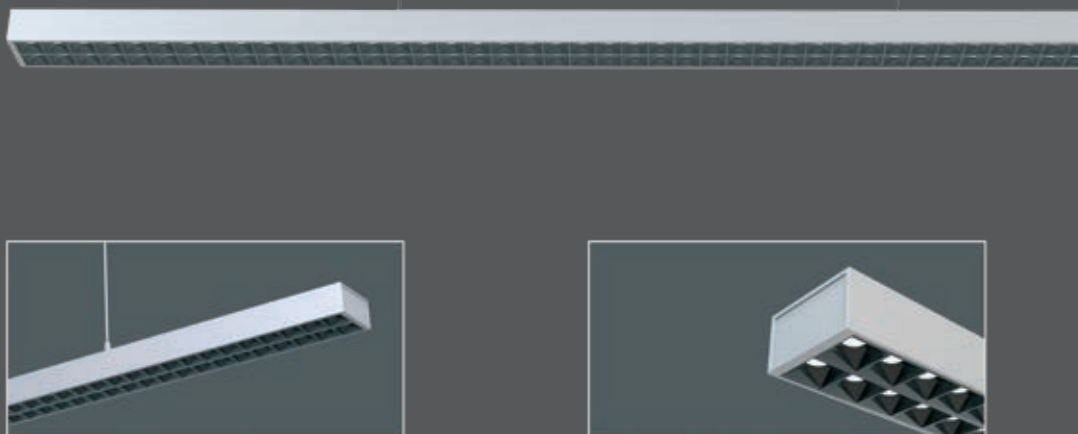

**5 YEAR WARRANTY**

**1-10V DIMMABLE**




**EAN Code** 3800157639910 4000K 3800157639927 4000K  **Box Qty.** **8 Pcs**

DESCRIPTION	ORDER NO.
LED Linear Light SAMSUNG CHIP - 60W Hangign Non Linkable White Body 4000K 1179x64x35mm UGR<6	LIVTS606
LED Linear Light SAMSUNG CHIP - 60W Hangign Non Linkable Silver Body 4000K 1179x64x35mm UGR<6	LIVTS607

UGR	<6	PF:	>0.9
Voltage/Frequency:	AC: 100-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	6600 lm	Body Type:	Aluminium
IP Rating:	IP20	Dimension:	1179 x 64 x 35 mm
CRI:	>80		


## Linear Hanging Light


**60W**  
VT-7-62

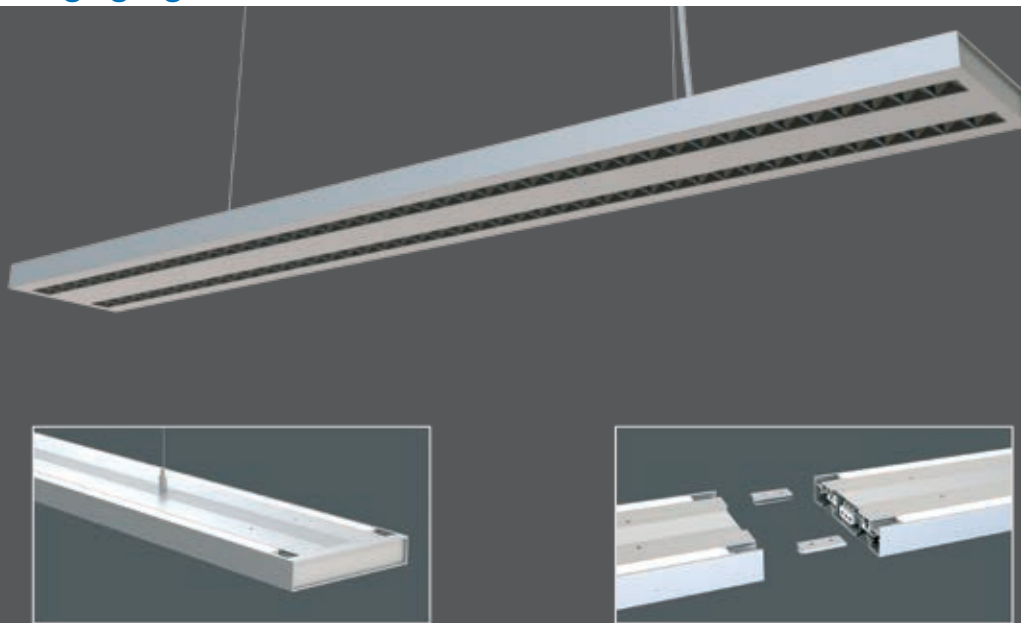

**5 YEAR WARRANTY**

**1-10V DIMMABLE**



**EAN Code** 3800157639934 4000K 3800157639941 4000K  **Box Qty.** **4 Pcs**

DESCRIPTION	ORDER NO.
LED Linear Light SAMSUNG CHIP - 60W Hangign Linkable White Body 4000K 1190x160x30mm UGR<6	LIVTS608
LED Linear Light SAMSUNG CHIP - 60W Hangign Linkable Silver Body 4000K 1190x160x30mm UGR<6	LIVTS609

UGR	<6	PF:	>0.9
Voltage/Frequency:	AC: 100-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	6600 lm	Body Type:	Aluminium
IP Rating:	IP20	Dimension:	1190 x 160 x 30 mm
CRI:	>80		


# LED LINEAR LIGHTS

Black, Silver and White colors

Up and  
Down  
lights

## Linear Hanging Up - Down Lights

60W  
VT-7-60

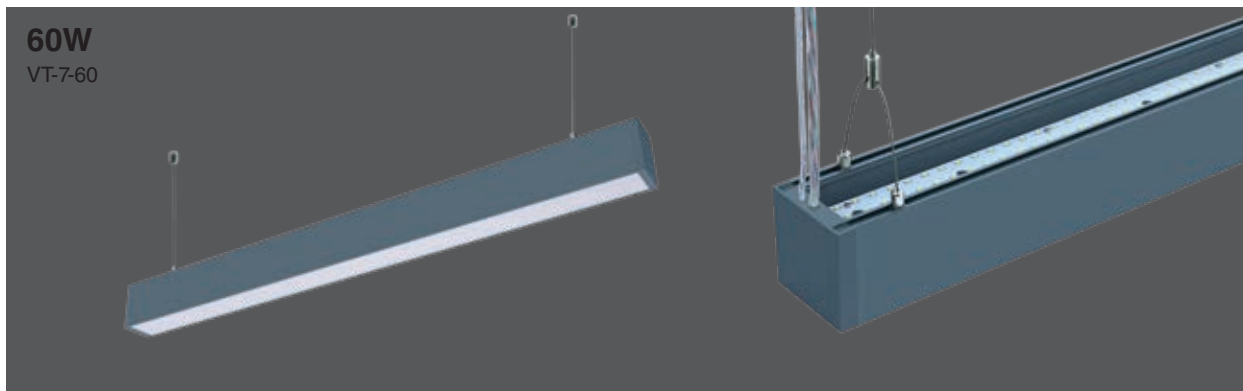

 **5 YEAR WARRANTY**

 **0-10V DIMMABLE**



**EAN Code** 3800157638517 4000K  
3800157638524 4000K  
3800157638531 4000K



Box Qty.  
**9 Pcs**

DESCRIPTION	ORDER NO.
LED Linear Light SAMSUNG CHIP - 60W Hanging Suspension White Body 4000K 1200x75x105mm UGR<19	LIVTS377
LED Linear Light SAMSUNG CHIP - 60W Hanging Suspension Silver Body 4000K 1200x75x105mm UGR<19	LIVTS378
LED Linear Light SAMSUNG CHIP - 60W Hanging Suspension Black Body 4000K 1200x75x105mm UGR<19	LIVTS379

UGR	<19	PF:	>0.9
Voltage/Frequency:	AC: 200-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	6000 lm	Body Type:	Aluminium
IP Rating:	IP20	Dimension:	1200 x 75 x 105 mm
CRI:	>80		

## LED Recessed Linear

40W  
VT-7-41



 **5 YEAR WARRANTY**

**LINKABLE**  
UP TO 12 METERS TOGETHER


**EAN Code** 3800157638548 4000K  
3800157638555 4000K



Box Qty.  
**9 Pcs**

DESCRIPTION	ORDER NO.
LED Linear Light SAMSUNG CHIP - 40W Recessed Silver Body 4000K 1211x70x35mm	LIVTS380
LED Linear Light SAMSUNG CHIP - 40W Recessed White Body 4000K 1211x70x35mm	LIVTS381


UGR	<6	PF:	>0.9
Voltage/Frequency:	AC: 200-240V, 50Hz	Beam Angle:	120°
Luminous Flux:	4000 lm	Body Type:	Aluminium
IP Rating:	IP20	Dimension:	1211 x 70 x 35 mm
CRI:	>80		



## LED Recessed Linear



**8W**

VT-7-41-L




**10W**

VT-7-41-LN




**12W**

VT-7-41-LW




**14W**

VT-7-41-T



**16W**

VT-7-41-X



EAN Code 3800157638593 4000K 3800157638609 4000K Box Qty. **8 Pcs**

DESCRIPTION	ORDER NO.
8W L SHAPE CONNECTOR 4000K -WHITE BODY	LIVTS385
8W L SHAPE CONNECTOR 4000K -SILVER BODY	LIVTS386
Voltage/Frequency:	AC: 220-240V, 50/60Hz
CRI:	80
Luminous Flux:	800 lm
Beam Angle:	120°
IP Rating:	IP20
Dimension:	163.60 x 163.60, 90°

EAN Code 3800157639415 4000K 3800157639422 4000K Box Qty. **8 Pcs**

DESCRIPTION	ORDER NO.
10W L SHAPE CONNECTOR-INSIDE 4000K WHITE BODY	LIVTS387
10W L SHAPE CONNECTOR-INSIDE 4000K SILVER BODY	LIVTS388
Voltage/Frequency:	AC: 220-240V, 50/60Hz
CRI:	80
Luminous Flux:	1000 lm
Beam Angle:	120°
IP Rating:	IP20
Dimension:	134.60 x 163.60, 90°

EAN Code 3800157639439 4000K 3800157639446 4000K Box Qty. **8 Pcs**

DESCRIPTION	ORDER NO.
12W L SHAPE CONNECTOR-OUTSIDE 4000K WHITE BODY	LIVTS389
12W L SHAPE CONNECTOR-OUTSIDE 4000K SILVER BODY	LIVTS390
Voltage/Frequency:	AC: 220-240V, 50/60Hz
CRI:	80
Luminous Flux:	1000 lm
Beam Angle:	120°
IP Rating:	IP20
Dimension:	181.70 x 163.60, 90°

EAN Code 3800157639453 4000K 3800157639460 4000K Box Qty. **4 Pcs**

DESCRIPTION	ORDER NO.
14W T SHAPE CONNECTOR-DOWNSIDE 4000K WHITE BODY	LIVTS391
14W T SHAPE CONNECTOR-DOWNSIDE 4000K SILVER BODY	LIVTS392
Voltage/Frequency:	AC: 220-240V, 50/60Hz
CRI:	80
Luminous Flux:	1200 lm
Beam Angle:	120°
IP Rating:	IP20
Dimension:	255 x 127.50, 90°

EAN Code 3800157639477 4000K 3800157639484 4000K Box Qty. **4 Pcs**

DESCRIPTION	ORDER NO.
16W X SHAPE CONNECTOR-DOWNSIDE 4000K WHITE BODY	LIVTS393
16W X SHAPE CONNECTOR-DOWNSIDE 4000K SILVER BODY	LIVTS394
Voltage/Frequency:	AC: 220-240V, 50/60Hz
CRI:	80
Luminous Flux:	1600 lm
Beam Angle:	120°
IP Rating:	IP20
Dimension:	127.50 x 127.50, 90°





## Recessed Spots

Introducing a sustainable and energy efficient replacement for power consuming 35W and 50W Halogen Spotlights.


### Applications

Perfect choice for Hotels, Bars, Commercial & Residential Lighting and Exhibition Stands

## Fitting-Round-GU10

VT-7227

EAN Code 3800157605885



GU10 Base | 100 Box Qty.

Material	Shape	Color of Fixture:	Dimension	Cutting Size
Ferrum	Round	White	Ø82x25mm	Ø74mm

**DESCRIPTION**
**ORDER NO.**


GU10 HOUSING ROUND MOVABLE WHITE SOCKET FOR GU10 NOT INCLUDED

LIVT3469

## Fitting-Round-GU10

VT-7227

EAN Code 3800157605892



GU10 Base | 100 Box Qty.

Material	Shape	Color of Fixture:	Dimension	Cutting Size
Ferrum	Round	Satin Nickel	Ø82x25mm	Ø74mm

**DESCRIPTION**
**ORDER NO.**


GU10 HOUSING ROUND MOVABLE SATIN NICKLE SOCKET FOR GU10 NOT INCLUDED

LIVT3470

## Fitting-Round-GU10

VT-7227

EAN Code 3800157605908



GU10 Base | 100 Box Qty.

Material	Shape	Color of Fixture:	Dimension	Cutting Size
Ferrum	Round	Stainless Steel	Ø82x25mm	Ø74mm

**DESCRIPTION**
**ORDER NO.**


GU10 HOUSING ROUND MOVABLE CHROME SOCKET FOR GU10 NOT INCLUDED

LIVT3471

## Fitting for 1xAR111

VT-7221

EAN Code 3800157607063



1xAR111 Base | 24 Box Qty.

Material	Shape	Color of Fixture:	Dimension	Cutting Size
Aluminium	Square	Black	174x174mm	168x155mm

**DESCRIPTION**
**ORDER NO.**



1xAR111 FITTING BLACK BODY SOCKET FOR GU10 NOT INCLUDED

LIVT3581

## Fitting for 2xAR111

VT-7222

EAN Code 3800157607070

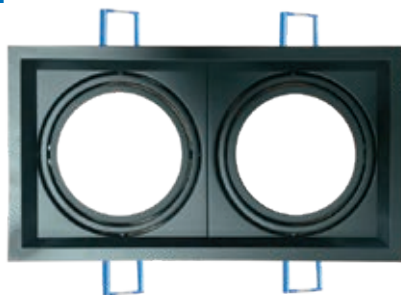

2xAR111 Base | 12 Box Qty.

Material	Shape	Color of Fixture:	Dimension	Cutting Size
Aluminium	Square	Black	325x174mm	306x162mm

**DESCRIPTION**
**ORDER NO.**


2xAR111 FITTING BLACK BODY SOCKET FOR GU10 NOT INCLUDED

LIVT3582

## Fitting-Round-GU10-2Pc Pack

VT-778

EAN Code 3800157607131



GU10 Base | 200 Box Qty.

Material	Shape	Color of Fixture:	Dimension	Cutting Size
Ferrum	Round	White	Ø80x30mm	Ø65mm

**DESCRIPTION**
**ORDER NO.**


GU10 ROUND SPOTLIGHT FITTING WHITE 2PCS/ BOX SOCKET FOR GU10 NOT INCLUDED

LIVT3584

## Fitting-Round-GU10-2Pc Pack

VT-778 ???

EAN Code 3800157607148



**GU10**  
Base

**200**  
Box Qty.


Material	Shape	Color of Fixture:	Dimension	Cutting Size
Ferrum	Round	Satin Nickel	Ø80x30mm	Ø65mm

DESCRIPTION	ORDER NO.
GU10 ROUND SPOTLIGHT FITTING SNATIN NICKLE 2PCS/BOX SOCKET FOR GU10 NOT INCLUDED	LIVT3585

## Fitting-Round-GU10-2Pc Pack

VT-778 ???

EAN Code 3800157607155



**GU10**  
Base

**200**  
Box Qty.


Material	Shape	Color of Fixture:	Dimension	Cutting Size
Ferrum	Round	Chrome	Ø80x30mm	Ø65mm

DESCRIPTION	ORDER NO.
GU10 ROUND SPOTLIGHT FITTING CHROME 2PCS/BOX SOCKET FOR GU10 NOT INCLUDED	LIVT3586

## Fitting-Round-GU10

VT-782

EAN Code 3800157607285



**1XGU10**  
Base

**100**  
Box Qty.


Material	Shape	Color of Fixture:	Dimension	Cutting Size
Aluminium	Round	White	Ø91x25mm	Ø75mm

DESCRIPTION	ORDER NO.
1 *GU10 FITTING ROUND WHITE SOCKET FOR GU10 NOT INCLUDED	LIVT3599

## Fitting-Round-GU10

VT-782

EAN Code 3800157607292



**1XGU10**  
Base

**100**  
Box Qty.


Material	Shape	Color of Fixture:	Dimension	Cutting Size
Aluminium	Round	Aluminium Brush	Ø91x25mm	Ø75mm

DESCRIPTION	ORDER NO.
1 *GU10 FITTING ROUND ALUMINIUM BRUSH SOCKET FOR GU10 NOT INCLUDED	LIVT3600

## Fitting-Round-GU10

VT-783RD

EAN Code 3800157607308



**2XGU10**  
Base

**50**  
Box Qty.


Material	Shape	Color of Fixture:	Dimension	Cutting Size
Aluminium	Round	White	173x91x25mm	155x75mm

DESCRIPTION	ORDER NO.
2 *GU10 FITTING ROUND WHITE SOCKET FOR GU10 NOT INCLUDED	LIVT3601

## Fitting-Square-GU10

VT-782SQ-WH

EAN Code 3800157607346



**1XGU10**  
Base

**100**  
Box Qty.


Material	Shape	Color of Fixture:	Dimension	Cutting Size
Aluminium	Square	White	91x91x25mm	Ø75mm

DESCRIPTION	ORDER NO.
1 *GU10 FITTING SQUARE WHITE SOCKET FOR GU10 NOT INCLUDED	LIVT3605

## Fitting-Square-GU10

VT-782SQ

EAN Code 3800157607353



1XGU10 Base | 100 Box Qty.

Material	Shape	Color of Fixture:	Dimension	Cutting Size
Aluminium	Square	Aluminium Brush	91x91x25mm	Ø75mm

### DESCRIPTION


### ORDER NO.

1\* GU10 FITTING SQUARE ALUMINIUM BRUSH SOCKET FOR GU10 NOT INCLUDED LIVT3606

## Fitting-Square-GU10

VT-783SQ

EAN Code 3800157607377



2XGU10 Base | 50 Box Qty.

Material	Shape	Color of Fixture:	Dimension	Cutting Size
Aluminium	Square	Aluminium Brush	173x91x25mm	155x75mm

### DESCRIPTION


### ORDER NO.

2\* GU10 FITTING SQUARE ALUMINIUM BRUSH SOCKET FOR GU10 NOT INCLUDED LIVT3608

## Fitting-Square-GU10

VT-787SQ-WH

EAN Code 3800157607445



GU10 Base | 100 Box Qty. | IP54 RATING

Material	Shape	Color of Fixture:	Dimension	Cutting Size
Zinc Alloy+Ferrum	Square	White	84x84x38mm	Ø75mm

### DESCRIPTION


### ORDER NO.

GU10 FITTING SQUARE IP54 WHITE SOCKET FOR GU10 NOT INCLUDED LIVT3615

## Fitting-Square-GU10

VT-787SQ-SN

EAN Code 3800157607452



GU10 Base | 100 Box Qty. | IP54 RATING

Material	Shape	Color of Fixture:	Dimension	Cutting Size
Zinc Alloy+Ferrum	Square	Satin Nickel	84x84x38mm	Ø75mm

### DESCRIPTION


### ORDER NO.

GU10 FITTING SQUARE IP54 SATIN NICKLE SOCKET FOR GU10 NOT INCLUDED LIVT3616

## Fitting-Square-GU10

VT-776

EAN Code 3800157616355



GU10 Base | 24 Box Qty.

Material	Shape	Color of Fixture:	Dimension	Cutting Size
Gypsum	Square	White	120x120x40mm	123x123mm

### DESCRIPTION


### ORDER NO.

GU10 FITTING SQUARE GYPSUM WHITE LIVT3641

## Fitting-Round-GU10

VT-775

EAN Code 3800157617130



GU10 Base | 100 Box Qty.

Material	Shape	Color of Fixture:	Dimension	Cutting Size
Aluminium	Round	Metallic Grey	Ø95x32mm	Ø85mm

### DESCRIPTION

### ORDER NO.


GU10 FITTING ROUND SILVER GREY 1 SOCKET FOR GU10 NOT INCLUDED LIVT3647



## Fitting-Round-GU10

VT-771

EAN Code 3800157618625



**GU10**  
Base

**20**  
Box Qty.




Material	Shape	Color of Fixture:	Dimension	Cutting Size
Gypsum	Round	White	Ø100x30mm	Ø103mm

DESCRIPTION	ORDER NO.
G10-GYPSUM FITTING-RD-WHITE	LIVT3652

## Fitting-Square-GU10-Frost Glass

VT-801SQ

EAN Code 3800157628938



**GU10**  
Base

**24**  
Box Qty.



Material	Shape	Color of Fixture:	Dimension	Cutting Size
Gypsum	Square	White	120x120x60mm	123x123mm

DESCRIPTION	ORDER NO.
GU 10 GYPSUM FITTING WITH FROST GLASS SQUARE	LIVT3691

## GU10-Holder-PVC Cable

VT-7888

EAN Code 3800157607827

PVC Cable

**GU10**  
Base

**500**  
Box Qty.



Material	Wire length
Ceramic	150mm

DESCRIPTION	ORDER NO.
GU 10 CERAMIC LAMPHOLDER WITH SILICON CABLE	LIVT3423



**GU10 FITTINGS**  
**EASY INSTALLATION**  
**ELEGANT DESIGN**



**5 YEAR  
WARRANTY**



## LED Reflector Downlight

Introducing V-TAC's LED reflector downlights with black housing—available in 10w, 20w & 30w & CRI rating of >80, to achieve any residential, retail, or hospitality lighting need.



**800**  
LUMENS  
10W

**1600**  
LUMENS  
20W

**2400**  
LUMENS  
30W

## LED Downlight

Our new reflector downlights feature adjustable beam angle direction. CRI rating of >90, to achieve any residential, retail, or hospitality lighting need.

**1450**  
LUMENS  
18W





# LED Panels

The PRO Series LED panels range are all made with top-quality PMMA diffusers which provides a uniformly distributed light and prevents the panels from turning yellow.

It proves its durability with exteriors composed of an innovative combination of Aluminum+PMMA+PP, and its energy-saving upgrade through the improved driver box and Samsung LED chip.

## Applications


Widely used in offices, schools, hospitals, and commercial establishments

## Key Features

- Inclusive of a quick connector
- Flicker-free; stable drivers eliminate flashes
- Better light quality: less false colour plots
- 80% lower power consumption than conventional downlights
- Choose from square and round frameless mini panels

## Premium Series-Square

**6W** VT-607  
**EAN Code** 3800230629845 3000K  
 3800230629852 4000K  
 3800230629869 6400K



**420**  
Lumens



**>80**  
CRI



**>0.7**  
PF



**Available**  
Emergency Pack:

Cutting Size



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:85-265V,50/60Hz	SMD	120°	Aluminium	120x120x12mm	40


### DESCRIPTION

### ORDER NO.

6W PREMIUM PANEL LIGHT SQUARE 3000K	LIVT4863
6W PREMIUM PANEL LIGHT SQUARE 4000K	LIVT4864
6W PREMIUM PANEL LIGHT SQUARE 6400K	LIVT4865

## Premium Series-Round

**6W** VT-607  
**EAN Code** 3800230629753 3000K  
 3800230629760 4500K



**420**  
Lumens



**>80**  
CRI



**>0.5**  
PF



**Available**  
Emergency Pack:

Cutting Size



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:85-265V,50/60Hz	SMD	120°	Aluminium	Ø120x12mm	40


### DESCRIPTION

### ORDER NO.

6W PREMIUM PANEL LIGHT ROUND 3000K	LIVT4854
6W PREMIUM PANEL LIGHT ROUND 4500K	LIVT4855

## Premium Series-Round

**12W** VT-1207  
**EAN Code** 3800230629784 3000K  
 3800230629791 4000K



**1000**  
Lumens



**>80**  
CRI



**>0.6**  
PF



**Available**  
Emergency Pack:

Cutting Size



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:85-265V,50/60Hz	SMD	120°	Aluminium	Ø170x12mm	20

### DESCRIPTION


### ORDER NO.

12W PREMIUM PANEL LIGHT ROUND 3000K	LIVT4857
12W PREMIUM PANEL LIGHT ROUND 4000K	LIVT4858



## Premium Series-Square

**12W** VT-1207  
**EAN Code** 3800230629876 3000K  
 3800230629883 4500K



**1000**  
Lumens

**>80**  
CRI

**>0.6**  
PF

**Available**  
Emergency Pack:


Cutting Size **155x155mm**

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:85-265V,50/60Hz	SMD	120°	Aluminium	170x170x12mm	20

DESCRIPTION	ORDER NO.
12W PREMIUM PANEL LIGHT SQUARE 3000K	LIVT4866
12W PREMIUM PANEL LIGHT SQUARE 4500K	LIVT4867

## Premium Series-Round

**18W** VT-1807  
**EAN Code** 3800230629814 3000K  
 3800230629821 4000K



**1500**  
Lumens

**>80**  
CRI

**>0.6**  
PF

**Available**  
Emergency Pack:


Cutting Size **Ø210mm**

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:85-265V,50/60Hz	SMD	120°	Aluminium	Ø225x12mm	20

DESCRIPTION	ORDER NO.
18W PREMIUM PANEL LIGHT ROUND 3000K	LIVT4860
18W PREMIUM PANEL LIGHT ROUND 4000K	LIVT4861

## Premium Series-Square

**18W** VT-1807  
**EAN Code** 3800230629906 3000K  
 3800230629913 4500K



**1500**  
Lumens

**>80**  
CRI

**>0.6**  
PF

**Available**  
Emergency Pack:


Cutting Size **205x205mm**

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:85-265V,50/60Hz	SMD	120°	Aluminium	225x225x12mm	20

DESCRIPTION	ORDER NO.
18W PREMIUM PANEL LIGHT SQUARE 3000K	LIVT4869
18W PREMIUM PANEL LIGHT SQUARE 4500K	LIVT4870

### Premium Series-Round

**24W** VT-2407  
**EAN Code** 3800157601559 3000K  
 3800157601566 4500K



**2000**  
Lumens



**>80**  
CRI



**>0.9**  
PF



**Available**  
Emergency Pack:

Cutting Size



Ø285mm

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:85-265V,50/60Hz	SMD	120°	Aluminium	Ø300x12mm	10

#### DESCRIPTION

#### ORDER NO.

24W PREMIUM PANEL LIGHT ROUND 3000K


LIVT4872

24W PREMIUM PANEL LIGHT ROUND 4500K

LIVT4873

### Premium Series-Square

**24W** VT-2407  
**EAN Code** 3800157602198 3000K  
 3800157602204 4000K



**2000**  
Lumens



**>80**  
CRI



**>0.9**  
PF



**Available**  
Emergency Pack:

Cutting Size



280x280mm

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:85-265V,50/60Hz	SMD	120°	Aluminium	300x300x12mm	10

#### DESCRIPTION

#### ORDER NO.

24W PREMIUM PANEL LIGHT SQUARE 3000K


LIVT4887

24W PREMIUM PANEL LIGHT SQUARE 4000K

LIVT4888

### Premium Series-Round

**30W** VT-3107  
**EAN Code** 3800157628075 4000K



**2400**  
Lumens



**>80**  
CRI



**>0.9**  
PF



**Available**  
Emergency Pack:

Cutting Size



Ø280mm

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:85-265V,50/60Hz	SMD	120°	Aluminium	Ø300x12mm	10

#### DESCRIPTION


#### ORDER NO.

30W LED PANEL LIGHT 4000K ROUND

LIVT6428

## Premium Series-Square

**36W** VT-3107  
**EAN Code** 3800157628099 4000K



Cutting Size **280x280mm**

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:85-265V,50/60Hz	SMD	120°	Aluminium	300x300x12mm	10

### DESCRIPTION

36W LED PANEL LIGHT SQUARE 4000K

### ORDER NO.

LIVT6430



## Emergency Pack-6W to 24W

VT-525

**EAN Code** 3800157627474

3Hr LED emergency lighting kit, designed to suit a wide range of LED types and circuits. The models have sealed Ni-Cd batteries able to guarantee high efficiency with high temperatures.



Voltage	Led output power	Charging time	Battery	Color of Fixture	Body Type:	Size	Emergency switch on time	Box Qty.
DC:30-42V	AC:220-240V,50/60Hz	24 Hours	NI-CD, 7.2V, 2000 mAh	Silver	Aluminium	455x52x33mm	< 1s	20

### DESCRIPTION

24W LED EMERGENCY KIT

### ORDER NO.

LIVT8275





V-TAC's new innovative adjustable mini panels are equipped with adjustable clips for a flexible cutting size of up to 200 mm.

Built with the most stable drivers in the market, have low maintenance panels without the flashes and the flickers.



These slim & modern panels lights up all the way to the edges, giving a contemporary lighting effect that is ideal for residential, office, or commercial indoor lighting.



QUICK CONNECTOR




## LED MINI PANELS

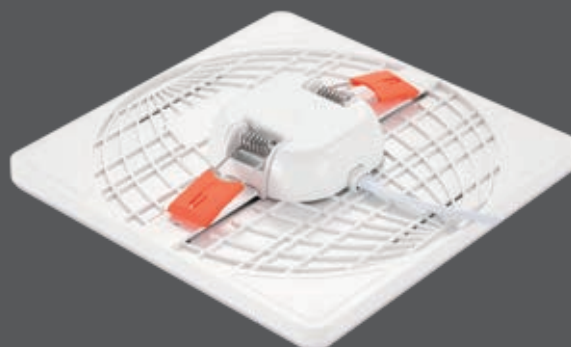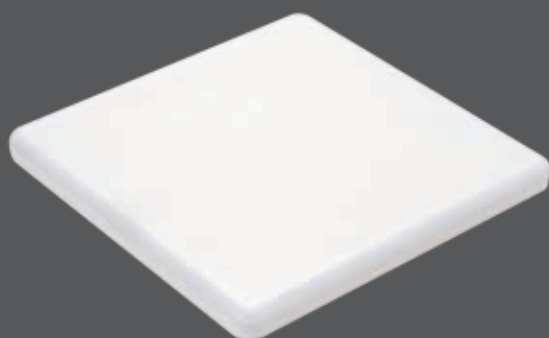

### Square Adjustable Panels

**12W** VT-610SQ  
**EAN Code** 3800157642996 3000K  
 3800157643009 4000K



**750**  
Lumens



**>80**  
CRI



**>0.5**  
PF

Cutting Size



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:200-265V,50/60Hz	SMD	120°	Aluminum	120x120x32mm	20,000 Hours	20

#### DESCRIPTION

#### ORDER NO.

12W-LED ADJUSTABLE PANEL-SQ-LED BY SAMSUNG-3000K


LIVTS730

12W-LED ADJUSTABLE PANEL-SQ-LED BY SAMSUNG-4000K

LIVTS731

### Square Adjustable Panels

**18W** VT-619SQ  
**EAN Code** 3800157643054 3000K  
 3800157643061 4000K



**1350**  
Lumens



**>80**  
CRI



**>0.5**  
PF

Cutting Size



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:200-265V,50/60Hz	SMD	120°	Aluminum	170x170x32mm	20,000 Hours	20

#### DESCRIPTION

#### ORDER NO.

18W-LED ADJUSTABLE PANEL-SQ-LED BY SAMSUNG-3000K


LIVTS736

18W-LED ADJUSTABLE PANEL-SQ-LED BY SAMSUNG-4000K

LIVTS737

### Square Adjustable Panels

**24W** VT-625SQ  
**EAN Code** 3800157643115 3000K  
 3800157643122 4000K



**1800**  
Lumens



**>80**  
CRI



**>0.5**  
PF

Cutting Size



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:200-265V,50/60Hz	SMD	120°	Aluminum	223x223x32mm	20,000 Hours	20

#### DESCRIPTION

#### ORDER NO.

24W-LED ADJUSTABLE PANEL-SQ-LED BY SAMSUNG-3000K

LIVTS742

24W-LED ADJUSTABLE PANEL-SQ-LED BY SAMSUNG-4000K


LIVTS743

## LED MINI PANELS



### Round Adjustable Panels

**12W** VT-610RD  
**EAN Code** 3800157643818 3000K  
 3800157643825 4000K



Cutting Size 75-100mm

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:200-265V,50/60Hz	SMD	120°	Aluminum	Ø120x32mm	20,000 Hours	20

#### DESCRIPTION

#### ORDER NO.

12W-LED ADJUSTABLE PANEL-RD-LED BY SAMSUNG-3000K


LIVTS727

12W-LED ADJUSTABLE PANEL-RD-LED BY SAMSUNG-4000K

LIVTS728

### Round Adjustable Panels

**18W** VT-619RD  
**EAN Code** 3800157643023 3000K  
 3800157643030 4000K



Cutting Size 75-100mm

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:200-265V,50/60Hz	SMD	120°	Aluminum	Ø170x32mm	20,000 Hours	20

#### DESCRIPTION

#### ORDER NO.

18W-LED ADJUSTABLE PANEL-RD-LED BY SAMSUNG-3000K


LIVTS733

18W-LED ADJUSTABLE PANEL-RD-LED BY SAMSUNG-4000K

LIVTS734

### Round Adjustable Panels

**24W** VT-625RD  
**EAN Code** 3800157643085 3000K  
 3800157643092 4000K



Cutting Size 75-200mm

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:200-265V,50/60Hz	SMD	120°	Aluminum	Ø223x32mm	20,000 Hours	20

#### DESCRIPTION

#### ORDER NO.

24W-LED ADJUSTABLE PANEL-RD-LED BY SAMSUNG-3000K

LIVTS739

24W-LED ADJUSTABLE PANEL-RD-LED BY SAMSUNG-4000K


LIVTS740

## Reflector Downlight




FLICKER FREE

UGR&lt;19



## Reflector Downlight

**12W** VT-2-12  
**EAN Code** 3800157650274 4000K  
 3800157650281 2700K

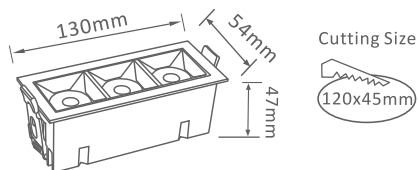

**960**  
Lumens

**>90**  
CRI

**>0.6**  
PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	12°	Aluminum	130x54x47mm	30,000 Hours	50

## DESCRIPTION


## ORDER NO.

12W LED REFLECTOR SMD DOWNLIGHT WITH SAMSUNG CHIP 4000K 12° D LIVTS974

12W LED REFLECTOR SMD DOWNLIGHT WITH SAMSUNG CHIP 2700K 12° D LIVTS975

## Reflector Downlight

**12W** VT-2-12  
**EAN Code** 3800157650427 4000K  
 3800157650434 2700K

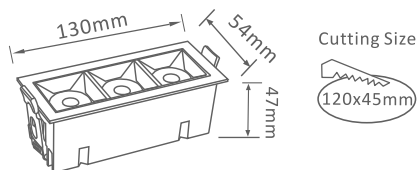

**960**  
Lumens

**>90**  
CRI

**>0.6**  
PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	38°	Aluminum	130x54x47mm	30,000 Hours	50

## DESCRIPTION


## ORDER NO.

12W LED REFLECTOR SMD DOWNLIGHT WITH SAMSUNG CHIP 4000K 38° D LIVTS989

12W LED REFLECTOR SMD DOWNLIGHT WITH SAMSUNG CHIP 2700K 38° D LIVTS990

## Reflector Downlight

**20W** VT-2-21  
**EAN Code** 3800157650335 4000K  
 3800157650342 2700K



**1600**  
Lumens

**>90**  
CRI

**>0.6**  
PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	12°	Aluminum	207x54x47mm	30,000 Hours	20

## DESCRIPTION

## ORDER NO.

20W LED REFLECTOR SMD DOWNLIGHT WITH SAMSUNG CHIP 4000K 12° D LIVTS980

20W LED REFLECTOR SMD DOWNLIGHT WITH SAMSUNG CHIP 2700K 12° D LIVTS981



## Reflector Downlight


**20W** VT-2-21  
**EAN Code** 3800157650489 4000K  
 3800157650496 2700K

**1600**  
Lumens


**>90**  
CRI

**>0.6**  
PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	38°	Aluminum	207x54x47mm	30,000 Hours	20



Cutting Size



DESCRIPTION	ORDER NO.
20W LED REFLECTOR SMD DOWNLIGHT WITH SAMSUNG CHIP 4000K 38° D	LIVTS995
20W LED REFLECTOR SMD DOWNLIGHT WITH SAMSUNG CHIP 2700K 38° D	LIVTS996

## Reflector Downlight


**36W** VT-2-36  
**EAN Code** 3800157650366 4000K  
 3800157650373 2700K

**2880**  
Lumens


**>90**  
CRI

**>0.6**  
PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	12°	Aluminum	130x130x47mm	30,000 Hours	20



Cutting Size



DESCRIPTION	ORDER NO.
36W LED REFLECTOR SMD DOWNLIGHT WITH SAMSUNG CHIP 4000K 12° D	LIVTS983
36W LED REFLECTOR SMD DOWNLIGHT WITH SAMSUNG CHIP 2700K 12° D	LIVTS984

## Reflector Downlight


**36W** VT-2-36  
**EAN Code** 3800157650519 4000K  
 3800157650526 2700K

**2880**  
Lumens


**>90**  
CRI

**>0.6**  
PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	38°	Aluminum	130x130x47mm	30,000 Hours	20



Cutting Size




DESCRIPTION	ORDER NO.
36W LED REFLECTOR SMD DOWNLIGHT WITH SAMSUNG CHIP 4000K 38° D	LIVTS998
36W LED REFLECTOR SMD DOWNLIGHT WITH SAMSUNG CHIP 2700K 38° D	LIVTS999



## Slim Surface-Round

**6W** VT-605RD  
**EAN Code** 3800157605380 3000K  
 3800157605397 4500K

**420** Lumens | 
 **>80** CRI | 
 **>0.9** PF | 
 **Available** Emergency Pack:




Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:110-265V,50/60Hz	SMD	120°	Aluminium	Ø90x24mm	40

DESCRIPTION	ORDER NO.
6W SURFACE PANEL PREMIUM ROUND 3000K	LIVT4904
6W SURFACE PANEL PREMIUM ROUND 4500K	LIVT4905

## Slim Surface-Square

**6W** VT-605SQ  
**EAN Code** 3800157605410 3000K  
 3800157605427 4500K

**420** Lumens | 
 **>80** CRI | 
 **>0.9** PF | 
 **Available** Emergency Pack:




Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:110-265V,50/60Hz	SMD	120°	Aluminium	90x90x24mm	40

DESCRIPTION	ORDER NO.
6W SURFACE PANEL PREMIUM SQUARE 3000K	LIVT4907
6W SURFACE PANEL PREMIUM SQUARE 4500K	LIVT4908

## Slim Surface-Round

**12W** VT-1205RD  
**EAN Code** 3800157605441 3000K  
 3800157605458 4000K

**900** Lumens | 
 **>80** CRI | 
 **>0.9** PF | 
 **Available** Emergency Pack:




Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:85-265V,50/60Hz	SMD	120°	Aluminium	Ø140x24mm	40

DESCRIPTION	ORDER NO.
12W SURFACE PANEL PREMIUM ROUND 3000K	LIVT4910
12W SURFACE PANEL PREMIUM ROUND 4000K	LIVT4911

## Slim Surface-Square

**12W** VT-1205SQ  
**EAN Code** 3800157605472 3000K  
 3800157605489 4000K



900  
Lumens



>80  
CRI



>0.9  
PF



Available  
Emergency Pack:

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:110-265V,50/60Hz	SMD	120°	Aluminium	140x140x24mm	40

### DESCRIPTION

### ORDER NO.

12W SURFACE PANEL PREMIUM SQUARE 3000K


LIVT4913

12W SURFACE PANEL PREMIUM SQUARE 4000K

LIVT4914

## Slim Surface-Round

**18W** VT-1805RD  
**EAN Code** 3800157605502 3000K  
 3800157605519 4000K



1440  
Lumens



>80  
CRI



>0.9  
PF



Available  
Emergency Pack:

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:85-265V,50/60Hz	SMD	120°	Aluminium	Ø190x24mm	20

### DESCRIPTION

### ORDER NO.

18W SURFACE PANEL PREMIUM ROUND 3000K


LIVT4916

18W SURFACE PANEL PREMIUM ROUND 4000K

LIVT4917

## Slim Surface-Square

**18W** VT-1805SQ  
**EAN Code** 3800157605533 3000K  
 3800157605540 4500K



1440  
Lumens



>80  
CRI



>0.9  
PF



Available  
Emergency Pack:

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Box Qty.
AC:110-265V,50/60Hz	SMD	120°	Aluminium	190x190x24mm	10

### DESCRIPTION

### ORDER NO.

18W SURFACE PANEL PREMIUM SQUARE 3000K

LIVT4919

18W SURFACE PANEL PREMIUM SQUARE 4500K

LIVT4920



## FIXTURES WITH LED **T5 Batten Fitting**

The new T5 Batten Fittings retain the premium qualities of V-TAC's fixtures with LED. Each fitting is fully compatible & linkable; multiple batten fittings can be connected with each other, making it an efficient alternative lighting fixture for both small and big indoor spaces.

### **Applications**

Widely used in offices, schools, hospitals, and commercial establishments

### **Key Features**


- LED provided by Samsung
- Lasts up to 30,000 hrs
- Built with strong, durable materials
- Linkable/Continuous T5 fittings

**LINKABLE**  
UP TO 12 METERS TOGETHER

## T5 Batten Fitting

**4W** VT-035  
**EAN Code** 3800157640947 3000K  
 3800157651226 4000K  
 3800157651233 6400K

**360** Lumens | **>80** CRI | **>0.9** PF




Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	120°	PC	320x30x22.80mm	30,000 Hours	25

DESCRIPTION	ORDER NO.
T5-0.3M-4W-SQUARE BATTEN FITING-LED BY SAMSUNG-3000K	LIVTS689
T5-0.3M-4W-SQUARE BATTEN FITING-LED BY SAMSUNG-4000K	LIVTS690
T5-0.3M-4W-SQUARE BATTEN FITING-LED BY SAMSUNG-6400K	LIVTS691

## T5 Batten Fitting

**7W** VT-065  
**EAN Code** 3800157651240 3000K  
 3800157651257 4000K  
 3800157651264 6400K

**630** Lumens | **>80** CRI | **>0.9** PF




Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	120°	PC	580x30x22.80mm	30,000 Hours	25

DESCRIPTION	ORDER NO.
T5-0.6M-7W-SQUARE BATTEN FITING-LED BY SAMSUNG-3000K	LIVTS692
T5-0.6M-7W-SQUARE BATTEN FITING-LED BY SAMSUNG-4000K	LIVTS693
T5-0.6M-7W-SQUARE BATTEN FITING-LED BY SAMSUNG-6400K	LIVTS694

## T5 Batten Fitting

**16W** VT-125  
**EAN Code** 3800157641005 3000K  
 3800157651288 4000K  
 3800157641029 6400K

**1440** Lumens | **>80** CRI | **>0.5** PF



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	120°	PC	1180x30x22.80mm	30,000 Hours	25

DESCRIPTION	ORDER NO.
T5-1.2M-16W-SQUARE BATTEN FITING-LED BY SAMSUG-3000K	LIVTS695
T5-1.2M-16W-SQUARE BATTEN FITING-LED BY SAMSUNG-4000K	LIVTS696
T5-1.2M-16W-SQUARE BATTEN FITING-LED BY SAMSUG-6400K	LIVTS697





## FIXTURES WITH LED **LED Prismatic Fittings**

The reliable 10w to 60w range of efficient LED prismatic fittings from V-TAC all have a high-lumen rating of 120 lm/w and are equipped with quick connectors to lessen set-up time during installation. Available in 3000K, 4000K, and 6400K color temperatures, these durable fittings are ideal for any indoor lighting use

### **Applications**

Widely used in offices, schools, hospitals, and commercial establishments

### **Key Features**

- LED provided by Samsung
- Lasts up to 30,000 hrs
- Built with strong, durable materials
- Linkable/Continuous T5 fittings

## LED Prismatic Fittings

**10W** VT-8-10  
**EAN Code** 3800157632140 3000K  
 3800157632157 4000K  
 3800157632164 6400K

**1200**  
Lumens

**>80**  
CRI

**>0.9**  
PF

**1**  
FEET


**120**  
Lumen/W

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	110°	Plastic	300x74.1x24.4mm	30,000 Hours	10

### DESCRIPTION

### ORDER NO.

10W LED GRILL FITTING-30CM WITH SAMSUNG CHIP 3000K	LIVTS659
10W LED GRILL FITTING-30CM WITH SAMSUNG CHIP 4000K	LIVTS660
10W LED GRILL FITTING-30CM WITH SAMSUNG CHIP 6400K	LIVTS661

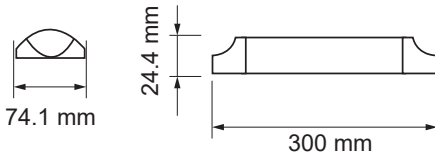

## LED Prismatic Fittings

**20W** VT-8-20  
**EAN Code** 3800157632171 3000K  
 3800157632188 4000K  
 3800157632195 6400K

**2400**  
Lumens

**>80**  
CRI

**>0.9**  
PF

**2**  
FEET


**120**  
Lumen/W

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	110°	Plastic	600x74.1x24.4mm	30,000 Hours	10

### DESCRIPTION

### ORDER NO.

20W LED GRILL FITTING-60CM WITH SAMSUNG CHIP 3000K	LIVTS662
20W LED GRILL FITTING-60CM WITH SAMSUNG CHIP 4000K	LIVTS663
20W LED GRILL FITTING-60CM WITH SAMSUNG CHIP 6400K	LIVTS664

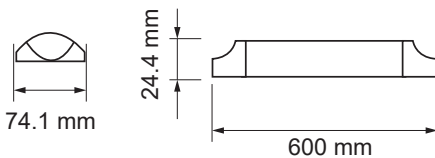

## LED Prismatic Fittings

**40W** VT-8-40  
**EAN Code** 3800157632201 3000K  
 3800157632218 4000K  
 3800157632225 6400K

**4800**  
Lumens

**>80**  
CRI

**>0.9**  
PF

**4**  
FEET


**120**  
Lumen/W

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	110°	Plastic	1200x74.1x24.4mm	30,000 Hours	10

### DESCRIPTION

### ORDER NO.

40W LED GRILL FITTING-120CM WITH SAMSUNG CHIP 3000K	LIVTS665
40W LED GRILL FITTING-120CM WITH SAMSUNG CHIP 4000K	LIVTS666
40W LED GRILL FITTING-120CM WITH SAMSUNG CHIP 6400K	LIVTS667

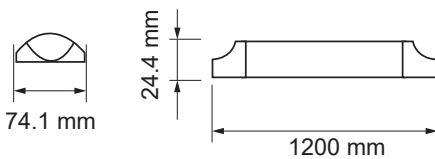

## LED Prismatic Fittings

**50W** VT-8-50  
**EAN Code** 3800157632232 4000K  
 3800157632249 6400K

**6000**  
Lumens

**>80**  
CRI

**>0.9**  
PF

**5**  
FEET


**120**  
Lumen/W

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	110°	Plastic	1500x74.1x24.4mm	30,000 Hours	10

### DESCRIPTION

### ORDER NO.

50W LED GRILL FITTING-150CM WITH SAMSUNG CHIP 4000K	LIVTS668
50W LED GRILL FITTING-150CM WITH SAMSUNG CHIP 6400K	LIVTS669

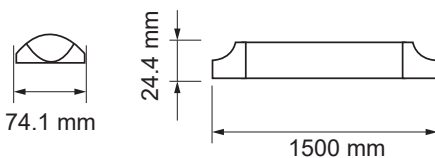



# LED Waterproof Fittings

Introducing part of Essentials range of IP65-rated waterproof tubes. Built with a tough, air-tight enclosure allowing it to resist jets of water and dust — an essential feature for outdoor lighting

## Applications

Widely used for Domestic and Commercial Lighting, Offices, Supermarkets, Shops, Hotels & similar environment.

## Key Features

- Easy to install
- IP65, free from water and dirt
- Direct wiring easily accessible when necessary
- Perfect replacement for the whole set of T8 fluorescent lighting fixture
- Save up to 80% in electricity consumption compared to fluorescent lighting fixture

## Waterproof Fitting

**18W** VT-6048  
 EAN Code 3800157603256 4500K



**1440** Lumens | 
 **110W** EQ.Watts | 
 **>70** CRI | 
 **>0.9** PF | 
 **<0.5s** Instant Start | 
 **10,000** On/Off | 
 **0,80 kg** Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:200-240V,50Hz	SMD	120°	ABS+Plastic	600x76x66mm	20,000 Hours	12

## DESCRIPTION


## ORDER NO.

LED WATERPROOF LAMP PC/PC 600MM 18W 4500K

LIVT6198

## Waterproof Fitting

**36W** VT-1248  
 EAN Code 3800157603270 4500K  
 3800157603287 6000K



**2880** Lumens | 
 **220W** EQ.Watts | 
 **>70** CRI | 
 **>0.9** PF | 
 **<0.5s** Instant Start | 
 **10,000** On/Off | 
 **1,42 kg** Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:200-240V,50Hz	SMD	120°	ABS+Plastic	1200x76x66mm	20,000 Hours	12

## DESCRIPTION

## ORDER NO.

LED WATERPROOF LAMP PC/PC 1200MM 36W 4500K

LIVT6200

LED WATERPROOF LAMP PC/PC 1200MM 36W 6000K

LIVT6201

## Waterproof Fitting

**48W** VT-1548  
 EAN Code 3800157602396 6000K



**3840** Lumens | 
 **300W** EQ.Watts | 
 **>70** CRI | 
 **>0.7** PF | 
 **<0.5s** Instant Start | 
 **10,000** On/Off | 
 **1,86 kg** Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:200-240V,50/60Hz	SMD	120°	ABS+Plastic	1480x76x66mm	20,000 Hours	12

## DESCRIPTION

## ORDER NO.

LED WATERPROOF LAMP PC/PC 1500MM 48W 6000K

LIVT6185





## Waterproof Fitting-G Series

**36W** VT-1249  
**EAN Code** 3800157616492 4500K  
 3800157616485 6400K

**IP65** RATING

2880 Lumens | 220W EQ.Watts | >70 CRI | >0.9 PF | <0.5s Instant Start | 10,000 On/Off | 0,60 kg Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	120°	Plastic	1200x65x58mm	20,000 Hours	12

### DESCRIPTION

LED WP G-SERIES ECONOMICAL TUBE 36W 120CM 4500K

**ORDER NO.** LIVT6285

LED WP G-SERIES ECONOMICAL TUBE 36W-120CM-6400K

**ORDER NO.** LIVT6284

## Waterproof Fitting-G Series

**48W** VT-1574  
**EAN Code** 3800157616515 4000K  
 3800157616508 6400K

**IP65** RATING

3840 Lumens | 300W EQ.Watts | >70 CRI | >0.9 PF | <0.5s Instant Start | 10,000 On/Off | 1,1 kg Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	120°	Plastic	1500x65x58mm	20,000 Hours	12

### DESCRIPTION

LED WP G-SERIES ECONOMICAL TUBE 48W 150CM 4000K

**ORDER NO.** LIVT6287

LED WP G-SERIES ECONOMICAL TUBE 48W150CM 6400K

**ORDER NO.** LIVT6286

## Waterproof Fitting



**5** YEAR  
WARRANTY

**IP65**  
RATING

**120**  
Lumen/W


Aluminum Body frame

## Waterproof Fittings

**60W**

VT-160

EAN Code 3800157632980 4000K  
3800157632997 6400K



**4**  
FEET



**7200**  
Lumens



**525W**  
EQ.Watts



**>80**  
CRI



**>0.9**  
PF



**<0.5s**  
Instant Start



**15000**  
On/Off



**2.1kg**  
Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	110°	Plastic+Aluminum	1200x86x70mm	20,000 Hours	9

### DESCRIPTION

### ORDER NO.

60W LED WATERPROOF LAMP PC/AL120CM WITH SAMSUNG CHIP 4000K 5 YRS WARRANTY A++

LIVTS678

60W LED WATERPROOF LAMP PC/AL120CM WITH SAMSUNG CHIP 6400K 5 YRS WARRANTY A++


LIVTS679

## Waterproof Fittings

**70W**

VT-170

EAN Code 3800157632966 4000K  
3800157632973 6400K



**5**  
FEET



**8400**  
Lumens



**600W**  
EQ.Watts



**>80**  
CRI



**>0.9**  
PF



**<0.5s**  
Instant Start



**15000**  
On/Off



**2.67kg**  
Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	110°	Plastic+Aluminum	1500x86x70mm	20,000 Hours	9

### DESCRIPTION

### ORDER NO.

70W LED WATERPROOF LAMP PC/AL150CM WITH SAMSUNG CHIP 4000K 5 YRS WARRANTY A++

LIVTS676

70W LED WATERPROOF LAMP PC/AL150CM WITH SAMSUNG CHIP 6400K 5 YRS WARRANTY A++

LIVTS677

## Emergency Waterproof Fittings



**3 YEAR**  
WARRANTY



**STAINLESS  
STEEL  
CLIPS**

**4**  
FEET

**120**  
Lumen/W


**Emergency** **Battery Backup**

**36W**

VT-120136E

EAN Code 3800157632102 4000K  
6400K

**IP65**  
RATING



**4320**  
Lumens



**300W**  
EQ.Watts



**>80**  
CRI



**>0.9**  
PF




**<1s**  
Instant Start



**>15,000**  
On/Off



**1.91 kg**  
Weight

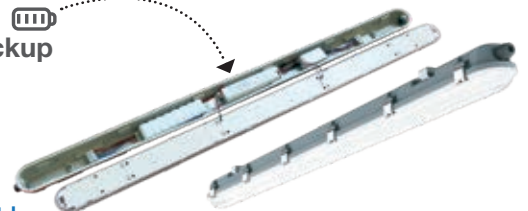

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50/60Hz	SMD	120°	PC	1200x78x72mm	20,000 Hours	12

### DESCRIPTION

### ORDER NO.

VT-120136E 36W LED WP LAMP FITTING 120CM-SAMSUNG CHIP & EM KIT-MILKY COVER+SS CLIPS COLORCODE:4000K

LIVTS20223

36W LED WP LAMP FITTING 120CM-SAMSUNG CHIP & EM KIT-MILKY COVER+SS CLIPS COLORCODE:6400K

LIVTS20222



# LED Floodlights

V-TAC's LED Floodlights are manufactured with industry-leading components to deliver an exceptional performance, making them the perfect choice for efficient outdoor lighting. Each unit is designed and made of diecast Aluminium for extreme durability. With the IP65 rating, all the floodlights in this series are also waterproof and dustproof.

## Applications

Recommended for any outdoor lighting application in residential, commercial, and industrial areas.

## Key Features

- 10w to 1000w
- IP65 rating -- high-quality components used to ensure waterproof/airtight performance
- Modern and strong diecast Aluminium enclosure with a minimalistic design, for high-end support and design
- Select units are inclusive of a 1-metre wire for convenience and easy installation

### Slimline-Black Body

**10W** VT-10  
**EAN Code** 3800157630801 3000K  
 3800157630818 4000K





**800**  
Lumens

**>80**  
CRI

**>0.9**  
PF

**IP65**  
RATING



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	115x108x26mm	30,000 Hours	20

#### DESCRIPTION

#### ORDER NO.

10W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K BLACK BODY

LIVTS424

10W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K BLACK BODY

LIVTS425

### Slimline-White Body

**10W** VT-10  
**EAN Code** 3800157630832 3000K  
 3800157630849 4000K





**800**  
Lumens

**>80**  
CRI

**>0.9**  
PF

**IP65**  
RATING



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	115x108x26mm	30,000 Hours	20

#### DESCRIPTION

#### ORDER NO.

10W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K WHITE BODY

LIVTS427

10W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY

LIVTS428

### Slimline-White Body

**10W** VT-10  
**EAN Code** 3800157630832 3000K  
 3800157630849 4000K





**800**  
Lumens

**>80**  
CRI

**>0.9**  
PF

**IP65**  
RATING



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	115x108x26mm	30,000 Hours	20

#### DESCRIPTION

#### ORDER NO.

10W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K GREY BODY

LIVTS430

10W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K GREY BODY

LIVTS431



## Slimline-Black Body



**20W** VT-20  
**EAN Code** 3800157630955 3000K  
 3800157630962 4000K



**1600**  
Lumens

**>80**  
CRI

**>0.9**  
PF



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	153x132x27mm	30,000 Hours	20

### DESCRIPTION

### ORDER NO.

20W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K BLACK BODY

LIVTS439

20W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K BLACK BODY

LIVTS440

## Slimline-White Body



**20W** VT-20  
**EAN Code** 3800157630986 3000K  
 3800157630993 4000K



**1600**  
Lumens

**>80**  
CRI

**>0.9**  
PF



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	153x132x27mm	30,000 Hours	20

### DESCRIPTION

### ORDER NO.

20W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K WHITE BODY

LIVTS442

20W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY

LIVTS443

## Slimline-Grey Body



**20W** VT-20  
**EAN Code** 3800157631013 3000K  
 3800157631020 4000K



**1600**  
Lumens

**>80**  
CRI

**>0.9**  
PF



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	153x132x27mm	30,000 Hours	20

### DESCRIPTION

### ORDER NO.

20W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K GREY BODY

LIVTS445

20W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K GREY BODY

LIVTS446



## Slimline-Black Body

**30W** VT-30  
**EAN Code** 3800157629195 3000K  
 3800157629034 4000K



**IP65**  
RATING

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



**2400**  
Lumens



**>80**  
CRI



**>0.9**  
PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	178x152 x28mm	30,000 Hours	10

### DESCRIPTION

### ORDER NO.

30W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K BLACK BODY

LIVTS400

30W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K BLACK BODY

LIVTS401



## Slimline-White Body

**30W** VT-30  
**EAN Code** 3800157630832 3000K  
 3800157630849 4000K



**IP65**  
RATING

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



**2400**  
Lumens



**>80**  
CRI



**>0.9**  
PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	178x152 x28mm	30,000 Hours	10

### DESCRIPTION

### ORDER NO.

30W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY

LIVTS403

30W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY

LIVTS404



## Slimline-Grey Body

**30W** VT-30  
**EAN Code** 3800157631105 3000K  
 3800157631112 4000K



**IP65**  
RATING

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



**2400**  
Lumens



**>80**  
CRI



**>0.9**  
PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	178x152 x28mm	30,000 Hours	10

### DESCRIPTION

### ORDER NO.

30W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K GREY BODY

LIVTS454

30W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K GREY BODY

LIVTS455


## Slimline-Black Body

**50W** VT-50  
**EAN Code** 3800157629218 3000K  
 3800157629072 4000K  
 3800157629089 6400K


**4000**  
Lumens

**>80**  
CRI

**>0.9**  
PF



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	223x188x28mm	30,000 Hours	208

### DESCRIPTION

### ORDER NO.

50W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K BLACK BODY

LIVTS406

50W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K BLACK BODY

LIVTS407

50W SMD FLOODLIGHT WITH SAMSUNG CHIP 6400K BLACK BODY

LIVTS408


## Slimline-White Body

**50W** VT-50  
**EAN Code** 3800157629225 3000K  
 3800157629096 4000K


**4000**  
Lumens

**>80**  
CRI

**>0.9**  
PF



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	223x188x28mm	30,000 Hours	8

### DESCRIPTION

### ORDER NO.

50W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K WHITE BODY

LIVTS409

50W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY

LIVTS410


## Slimline-Grey Body

**50W** VT-50  
**EAN Code** 3800157631198 3000K  
 3800157631204 4000K


**4000**  
Lumens

**>80**  
CRI

**>0.9**  
PF



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	223x188x28mm	30,000 Hours	8

### DESCRIPTION

### ORDER NO.

50W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K GREY BODY

LIVTS463

50W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K GREY BODY

LIVTS464



## Slimline-Black Body



① METER WIRE

**100W** VT-100  
**EAN Code** 3800157629232 3000K  
 3800157629119 4000K  
 3800157629126 6400K


**8000**  
Lumens

**>80**  
CRI


**>0.9**  
PF



**IP65**  
RATING



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	291x240x30mm	30,000 Hours	4

### DESCRIPTION

### ORDER NO.

100W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K BLACK BODY	LIVTS412
100W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K BLACK BODY	LIVTS413
100W SMD FLOODLIGHT WITH SAMSUNG CHIP 6400K BLACK BODY	LIVTS414

## Slimline-White Body



① METER WIRE

**100W** VT-100  
**EAN Code** 3800157629249 3000K  
 3800157629133 4000K


**8000**  
Lumens

**>80**  
CRI


**>0.9**  
PF



**IP65**  
RATING



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	291x240x30mm	30,000 Hours	4

### DESCRIPTION

### ORDER NO.

100W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K WHITE BODY	LIVTS415
100W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY	LIVTS416

## Slimline-Grey Body



① METER WIRE

**100W** VT-100  
**EAN Code** 3800157631280 3000K  
 3800157631297 4000K


**8000**  
Lumens

**>80**  
CRI


**>0.9**  
PF



**IP65**  
RATING



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	291x240x30mm	30,000 Hours	4

### DESCRIPTION

### ORDER NO.

100W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K GREY BODY	LIVTS472
100W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K GREY BODY	LIVTS473



### Slimline-Black Body


**150W** VT-150  
**EAN Code** 3800157631310 3000K  
 3800157631327 4000K  
 3800157631334 6400K

 **12000**  
 Lumens


 **>80**  
 CRI

 **>0.9**  
 PF

 **IP65**  
 RATING



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	404x322x52mm	30,000 Hours	2

#### DESCRIPTION

#### ORDER NO.

150W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K BLACK BODY

LIVTS475

150W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K BLACK BODY

LIVTS476

150W SMD FLOODLIGHT WITH SAMSUNG CHIP 6400K BLACK BODY

LIVTS477

### Slimline-White Body


**150W** VT-150  
**EAN Code** 3800157631341 3000K  
 3800157631358 4000K

 **12000**  
 Lumens


 **>80**  
 CRI

 **>0.9**  
 PF

 **IP65**  
 RATING



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	404x322x52mm	30,000 Hours	2

#### DESCRIPTION

#### ORDER NO.

150W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K WHITE BODY

LIVTS478

150W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY

LIVTS479

### Slimline-Grey Body


**150W** VT-150  
**EAN Code** 3800157631372 3000K  
 3800157631389 4000K

 **12000**  
 Lumens


 **>80**  
 CRI

 **>0.9**  
 PF

 **IP65**  
 RATING



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	404x322x52mm	30,000 Hours	2

#### DESCRIPTION

#### ORDER NO.

150W SMD FLOODLIGHT WITH SAMSUNG CHIP 3000K GREY BODY

LIVTS481

150W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K GREY BODY

LIVTS482

① METER WIRE

① METER WIRE


① METER WIRE




### Slimline-Black Body

**200W** VT-200  
 EAN Code 3800157629157 4000K  
 3800157629164 6400K

16000 Lumens | >80 CRI | >0.9 PF



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	439x346x56mm	30,000 Hours	2

#### DESCRIPTION

#### ORDER NO.

200W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K BLACK BODY

LIVTS418


200W SMD FLOODLIGHT WITH SAMSUNG CHIP 6400K BLACK BODY

LIVTS419


### Slimline-White Body

**200W** VT-200  
 EAN Code 3800157629171 4000K

16000 Lumens | >80 CRI | >0.9 PF



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	439x346x56mm	30,000 Hours	2

#### DESCRIPTION

#### ORDER NO.


200W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY

LIVTS420


### Slimline-Grey Body

**200W** VT-200  
 EAN Code 3800157631402 4000K

16000 Lumens | >80 CRI | >0.9 PF



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	439x346x56mm	30,000 Hours	2

#### DESCRIPTION

#### ORDER NO.

200W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K GREY BODY

LIVTS484



① METER WIRE



① METER WIRE



① METER WIRE

## Slimline-Black Body

**300W** VT-300  
**EAN Code** 3800157629225 4000K



① METER WIRE



**24000**  
Lumens




**>80**  
CRI




**>0.9**  
PF



**IP65**  
RATING



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	529x415x55mm	30,000 Hours	2

### DESCRIPTION

300W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K BLACK BODY

### ORDER NO.

LIVTS422

## Slimline-White Body

**300W** VT-300  
**EAN Code** 3800157631426 4000K



① METER WIRE



**24000**  
Lumens




**>80**  
CRI




**>0.9**  
PF



**IP65**  
RATING



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	529x415x55mm	30,000 Hours	2

### DESCRIPTION

300W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY

### ORDER NO.

LIVTS486

## Slimline-Grey Body

**300W** VT-300  
**EAN Code** 3800157631440 4000K  
 3800157631457 6400K



① METER WIRE



**24000**  
Lumens




**>80**  
CRI




**>0.9**  
PF



**IP65**  
RATING



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	529x415x55mm	30,000 Hours	2

### DESCRIPTION

300W SMD FLOODLIGHT WITH SAMSUNG CHIP 4000K GREY BODY

### ORDER NO.

LIVTS488

300W SMD FLOODLIGHT WITH SAMSUNG CHIP 6400K GREY BODY

LIVTS489



### Slimline-Black Body - High Lumen

**400W** VT-405  
**EAN Code** 3800157649728 4000K  
 3800157649735 6400K

 **48000** Lumens |  **>80** CRI |  **>0.9** PF



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	580x505x155mm	30,000 Hours	1

#### DESCRIPTION

#### ORDER NO.

400W LED FLOODLIGHT WITH SAMSUNG CHIP&CABLE(1 M)4000K BLACK BODY GRAY GLASS(120LM/W)

LIVTS964

400W LED FLOODLIGHT WITH SAMSUNG CHIP&CABLE(1 M)6400K BLACK BODY GRAY GLASS(120LM/W)

LIVTS965



### Slimline-Black Body - High Lumen

**500W** VT-505  
**EAN Code** 3800157649742 4000K  
 3800157649759 6400K

 **60000** Lumens |  **>80** CRI |  **>0.9** PF



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	580x505x155mm	30,000 Hours	1

#### DESCRIPTION

#### ORDER NO.

500W LED FLOODLIGHT WITH SAMSUNG CHIP&CABLE(1 M)4000K BLACK BODY GRAY GLASS(120LM/W)

LIVTS966

500W LED FLOODLIGHT WITH SAMSUNG CHIP&CABLE(1 M)6400K BLACK BODY GRAY GLASS(120LM/W)

LIVTS967



### Slimline-Black Body - High Lumen

**1000W** VT-1055  
**EAN Code** 3800157649773 6400K

 **120000** Lumens |  **>80** CRI |  **>0.9** PF



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	709x709x155mm	30,000 Hours	1

#### DESCRIPTION

#### ORDER NO.

1000W LED FLOODLIGHT WITH SAMSUNG CHIP&CABLE(1 M)6400K BLACK-BODY GRAYGLASS(120LM/W)

LIVTS969



**120** Lumen/W  
 ① METER WIRE



**120** Lumen/W  
 ① METER WIRE



**120** Lumen/W  
 ① METER WIRE

## Rechargeable Floodlight

**20W** VT-20-R  
**EAN Code** 3800157644501 6400K


**BATTERY**  
**3.7V Li-Ion 3600mAh**

**MICRO SOCKET**  
**USB PORT**

**SOS FLASH**

**IP44 RATING**

**1400 Lumens** | **>80 CRI** | **>0.9 PF**



Voltage	LED Type	Beam Angle	Body Colour	Dimension	Life span	Box Qty.
AC:100-240V	SMD	100°	Black, Green	175x125mm	30,000 Hours	20

### DESCRIPTION

### ORDER NO.


20W-PLASTIC RECHARGEABLE FLOODLIGHT-LED BY SAMSUNG-IP44-6400K

LIVTS504


## PIR Sensor White Body

**10W** VT-10-S  
**EAN Code** 3800157630894 3000K  
 3800157630900 4000K

**IP65 RATING**



**800 Lumens** | **>70 CRI** | **>0.7 PF**



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	153.78x114.5x54.86mm	30,000 Hours	20

### DESCRIPTION

### ORDER NO.

10W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 3000K WHITE BODY WHITE GLASS

LIVTS433


10W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY WHITE GLASS

LIVTS434


## PIR Sensor Black Body

**10W** VT-10-S  
**EAN Code** 3800157631440 3000K  
 3800157631457 4000K

**IP65 RATING**



**800 Lumens** | **>70 CRI** | **>0.7 PF**



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	153.78x114.5x54.86mm	30,000 Hours	20

### DESCRIPTION

### ORDER NO.

10W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 3000K BLACK BODY GREY GLASS

LIVTS436

10W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 4000K BLACK BODY GREY GLASS

LIVTS437

MOTION  
(PIR)  
SENSOR

① METER WIRE


MOTION  
(PIR)  
SENSOR

① METER WIRE




## PIR Sensor White Body

**20W** VT-20-S  
**EAN Code** 3800157631044 3000K  
 3800157631051 4000K



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



**1600** Lumens | **>70** CRI | **>0.7** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	177.75x153x55.46mm	30,000 Hours	20

### DESCRIPTION

### ORDER NO.

20W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 3000K WHITE BODY WHITE GLASS


LIVTS448

20W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY WHITE GLASS


LIVTS449

## PIR Sensor Black Body

**20W** VT-20-S  
**EAN Code** 3800157631075 3000K  
 3800157631082 4000K



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



**1600** Lumens | **>70** CRI | **>0.7** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	177.75x153x55.46mm	30,000 Hours	20

### DESCRIPTION

### ORDER NO.

20W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 3000K BLACK BODY GREY GLASS


LIVTS451

20W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 4000K BLACK BODY GREY GLASS


LIVTS452

## PIR Sensor White Body

**30W** VT-30-S  
**EAN Code** 3800157631136 3000K  
 3800157631143 4000K



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



**2400** Lumens | **>70** CRI | **>0.9** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	197.75x178x57.16mm	30,000 Hours	20

### DESCRIPTION

### ORDER NO.

30W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 3000K WHITE BODY WHITE GLASS

LIVTS457

30W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY WHITE GLASS

LIVTS458



MOTION  
(PIR)  
SENSOR

① METER WIRE



MOTION  
(PIR)  
SENSOR

① METER WIRE



MOTION  
(PIR)  
SENSOR

① METER WIRE






### PIR Sensor Black Body

**30W** VT-30-S  
**EAN Code** 3800157631044 3000K  
 3800157631051 4000K


**2400**  
Lumens

**>70**  
CRI

**>0.9**  
PF



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	197.75x178x57.16mm	30,000 Hours	20

#### DESCRIPTION

#### ORDER NO.

30W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 3000K BLACK BODY GREY GLASS

LIVTS460

30W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 4000K BLACK BODY GREY GLASS

LIVTS461

MOTION  
(PIR)  
SENSOR

① METER WIRE




### PIR Sensor White Body

**50W** VT-50-S  
**EAN Code** 3800157631228 3000K  
 3800157631235 4000K


**4000**  
Lumens

**>70**  
CRI

**>0.9**  
PF



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	255x237x51mm	30,000 Hours	10

#### DESCRIPTION

#### ORDER NO.

50W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 3000K WHITE BODY WHITE GLASS

LIVTS466

50W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 4000K WHITE BODY WHITE GLASS

LIVTS467

MOTION  
(PIR)  
SENSOR

① METER WIRE




### PIR Sensor Black Body

**50W** VT-50-S  
**EAN Code** 3800157631259 3000K  
 3800157631266 4000K


**4000**  
Lumens

**>70**  
CRI

**>0.9**  
PF



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	100°	Die casting Aluminium	255x237x51mm	30,000 Hours	10

#### DESCRIPTION

#### ORDER NO.

50W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 3000K BLACK BODY GREY GLASS

LIVTS469

50W SMD PIR SENSOR FLOODLIGHT WITH SAMSUNG CHIP 4000K BLACK BODY GREY GLASS

LIVTS470

MOTION  
(PIR)  
SENSOR

① METER WIRE



## Billboard Stand

VT-793  
EAN Code 3800157607803

Body Type	Dimension	Suitable For	Box Qty.
Aluminium	870x200mm	70w - 100w - 120w - 150w - 200w	4

### DESCRIPTION

### ORDER NO.

BILLBOARD STAND FOR FLOODLIGHT /70W,100W,150W,200W/ 87CM\*20CM LIVT3622



## Billboard Stand

VT-794  
EAN Code 3800157607810

Body Type	Dimension	Suitable For	Box Qty.
Aluminium	850x150mm	10w - 20w - 30w - 50w	4

### DESCRIPTION

### ORDER NO.

BILLBOARD STAND FOR FLOODLIGHT /10W,20W,30W,50W/ 87CM\*20CM LIVT3623



**5 YEAR  
WARRANTY**



**JUMBO  
POWER** 

**400  
Watts**

**500  
Watts**

**1000  
Watts**



# LED

## Linear Low Bay

Our series of LED Low Bay fixtures allow parallel lighting on supermarket aisles, workshops, warehouses, and factories which is proven to be approximately 50% more efficient than a perpendicular lighting layout and also decreases eye strain. This range offers strong and ample light with promising 120 lm/w options and impressive energy-saving features compared to its traditional counterparts. Available in 100w to 200w.

### **Applications**

Recommended for lighting in warehouses, factories, gymnasiums, or any large open area with high ceiling

### **Key Features**

- Upgraded with premium-quality Samsung LEDs
- Strong and durable diecast aluminum body
- Heat and Shock Resistant
- Low-maintenance

## LED Linear Low Bay

**100W** VT-9-112  
**EAN Code** 3800157646093 4000K  
 3800157646109 6500K




 **12000** Lumens |  **>80** CRI |  **>0.9** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	120°	Aluminum	530x73.5mm	30,000 Hours	6

DESCRIPTION	ORDER NO.
100W LED LINEAR HIGHBAY BLACK BODY LED BY SAMSUNG 4000K 120LM/W	LIVTS891
100W LED LINEAR HIGHBAY WITH SAMSUNG CHIP 6500K BLACK BODY(120LM/W) 120° D	LIVTS892

**120** Lumen/W  **IP54 RATING**



## LED Linear Low Bay

**150W** VT-9-152  
**EAN Code** 3800157646116 4000K  
 3800157646123 6500K




 **18000** Lumens |  **>80** CRI |  **>0.9** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	120°	Aluminum	790x73.5mm	30,000 Hours	6

DESCRIPTION	ORDER NO.
150W LED LINEAR HIGHBAY WITH SAMSUNG CHIP 4000K BLACK BODY(120LM/W) 120° D	LIVTS893
150W LED LINEAR HIGHBAY WITH SAMSUNG CHIP 6500K BLACK BODY(120LM/W) 120° D	LIVTS894

**120** Lumen/W  **IP54 RATING**



## LED Linear Low Bay

**200W** VT-9-202  
**EAN Code** 3800157646130 4000K  
 3800157646147 6500K




 **24000** Lumens |  **>80** CRI |  **>0.9** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	120°	Aluminum	1045x73.5mm	30,000 Hours	6

DESCRIPTION	ORDER NO.
200W-(120LM/W) 120° D-LED LINEAR HIGHBAY-BLACK BODY-LED BY SAMSUNG-4000K	LIVTS895
200W LED LINEAR HIGHBAY WITH SAMSUNG CHIP 6500K BLACK BODY(120LM/W) 120° D	LIVTS896

**120** Lumen/W  **IP54 RATING**





# LED Strip Lights

Add an extensive array of lights and colors to any setting or interior, rejuvenate and transform the ambience of any environment at the flick of a switch with V-TAC's LED Strip Light Series. Easy installation with minimal space requirement makes this the right choice for Restaurants, Auditoriums, Meeting Rooms etc.

## **Applications**

Outdoor applications like streets, projects, cross roads, tunnels, car parks, industrial facilities etc.

## **Key Features**

- Flexible & easy installation
- Exceptionally low power consumption
- Multiple visual effects in unending colours and shades



## Led strips-3528 60 LEDs

**3.6W** VT-3528 IP20  
**EAN Code** 3800230621160 3000K



LED Type:	SMD	lm/M:	400lm
Watt/M:	3.6w	lm/LED:	5-6lm
Current/M:	0.3A	Beam Angle:	120°
Voltage:	DC:12V	IP Rating:	IP20
LED Qty	60	Width:	8mm



DESCRIPTION	ORDER NO.
LS 3528 60 LED 3000K NON WATER PROOF WHITE PCB	LIVT2016

## Led strips-3528 120 LEDs

**7.2W** VT-3528 IP20  
**EAN Code** 3800230621306 3000K  
 3800230621320 4500K



LED Type:	SMD	lm/M:	600lm
Watt/M:	7.2w	lm/LED:	5-6lm
Current/M:	0.6A	Beam Angle:	120°
Voltage:	DC:12V	IP Rating:	IP20
LED Qty	120	Width:	8mm



DESCRIPTION	ORDER NO.
LS 3528 120 LED 3000K NON WATER PROOF WHITE PCB	LIVT2025
LS 3528 120 LED 4000K NON WATER PROOF WHITE PCB	LIVT2042

## Led strips-5050 60 LEDs

**10.8W** VT-5050  
**EAN Code** 3800230621542 RGB

VT-5050 IP20  
 3800230621504 3000K  
 3800230621467 4500K



LED Type:	SMD	lm/M:	1000lm
Watt/M:	10.8w	lm/LED:	14-16lm
Current/M:	0.9A	Beam Angle:	120°
Voltage:	DC:12V	IP Rating:	IP20
LED Qty	60	Width:	10mm



DESCRIPTION	ORDER NO.
LS 5050 60LED RGB NON WATER PROOF WHITE PCB	LIVT2120
LS 5050 60 LED 3000K NON WATER PROOF WHITE PCB	LIVT2122
LS 5050 60 LED 4500K NON WATER PROOF WHITE PCB	LIVT2143

## Led strips-5050 30 LEDs

**4.8W** VT-5050 IP20  
**EAN Code** 3800230621535 RGB



LED Type:	SMD	lm/M:	500lm
Watt/M:	4.8w	lm/LED:	14-16lm
Current/M:	0.4A	Beam Angle:	120°
Voltage:	DC:12V	IP Rating:	IP20
LED Qty	30	Width:	10mm




DESCRIPTION	ORDER NO.
LS 5050 30 LED RGB NON WATER PROOF WHITE PCB	LIVT2124

## Led strips-5050 60 LEDs

**10.8W** VT-5050 IP65  
**EAN Code** 3800230621511 3000K  
 3800230621474 4500K  
 3800230621559 RGB



LED Type:	SMD	lm/M:	1000lm
Watt/M:	10.8w	lm/LED:	14-16lm
Current/M:	0.9A	Beam Angle:	120°
Voltage:	DC:12V	IP Rating:	IP65
LED Qty	60	Width:	10mm

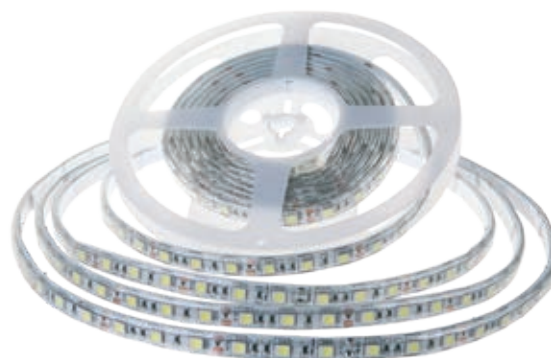

DESCRIPTION	ORDER NO.
LS SMD5050 60 LED 3000K IP65	LIVT2149
LS SMD5050 60 LED 4500K IP65	LIVT2150
LS SMD5050 60 LED RGB IP65	LIVT2155

## Led strips-5050 60 LEDs

**10.8W** VT-5050  
**EAN Code** 3800230629623 RGB

VT-5050 IP20  
 3800230621504 3000K



LED Type:	SMD	lm/M:	900lm
Watt/M:	10.8w	lm/LED:	15lm
Current/M:	1.2A	Beam Angle:	120°
Voltage:	DC:12V	IP Rating:	IP20
LED Qty	60	Width:	10mm



DESCRIPTION	ORDER NO.
LS 5050 60LED RGB+WHITE NON WATER PROOF	LIVT2159

## Led strips-2835 204 LEDs

**18W** VT-2835 204  
**EAN Code** 3800157612234 3000K  
 3800157612241 4500K  
 3800157612258 6000K



LED Type:	SMD	lm/M:	1700lm
Watt/M:	18w	lm/LED:	9-11lm
Current/M:	1.5A	Beam Angle:	120°
Voltage:	DC:12V	IP Rating:	IP20
LED Qty	204	Width:	10mm



DESCRIPTION	ORDER NO.
LS SMD2835 204 LED 3000K IP20	LIVT2461
LS SMD2835 204 LED 4000K IP20	LIVT2462
LS SMD2835 204 LED 6000K IP20	LIVT2463

## Led strips-2835 126 LEDs

**8W** VT-2835  
**EAN Code** 3800157653121 3000K  
 3800157653138 4500K  
 3800157653145 6400K



LED Type:	SMD	lm/M:	1200lm
Watt/M:	8w	lm/LED:	28-30lm
Current/M:	0.33A	Beam Angle:	120°
Voltage:	DC:24V	IP Rating:	IP20
LED Qty	126	Width:	10mm



DESCRIPTION	ORDER NO.
2835/126 LED STRIP LIGHT 3000K IP20 24V 150LM/W/5M	LIVT2593
2835/126 LED STRIP LIGHT 4000K IP20 24V 150LM/W/5M	LIVT2594
2835/126 LED STRIP LIGHT 6400K IP20 24V 150LM/W /5M	LIVT2595

## Led strips-2835 168 LEDs

**11W** VT-2835  
**EAN Code** 3800157653152 3000K  
 3800157653169 4000K  
 3800157653176 6400K



LED Type:	SMD	lm/M:	1650lm
Watt/M:	11w	lm/LED:	28-30lm
Current/M:	0.45A	Beam Angle:	120°
Voltage:	DC:24V	IP Rating:	IP20
LED Qty	168	Width:	10mm



DESCRIPTION	ORDER NO.
2835/168 LED STRIP LIGHT 3000K IP20 24V 150LM/W/5M	LIVT2596
2835/168 LED STRIP LIGHT 4000K IP20 24V 150LM/W/5M	LIVT2597
2835/168 LED STRIP LIGHT 6400K IP20 24V 150LM/W/5M	LIVT2598

## Led strips-2835 204 LEDs-High Lumen

**18W** VT-2835  
**EAN Code** 3800157610117 3000K  
 3800157610124 4000K  
 3800157610131 6400K



**3000**  
LUMENS PER METER

**150**  
Lumen/W



LED Type:	SMD	lm/M:	3000lm
Watt/M:	18w	lm/LED:	20-22lm
Current/M:	1.5A	Beam Angle:	120°
Voltage:	DC:12V	IP Rating:	IP20
LED Qty	240	Width:	10mm

DESCRIPTION	ORDER NO.
LED STRIP SMD2835 240LED HIGH LUMEN 3000K IP20	LIVT2164
LED STRIP SMD2835 240LED HIGH LUMEN 4000K IP20	LIVT2165
LED STRIP SMD2835 240LED HIGH LUMEN 6400K IP20	LIVT2166

## Led strips-2216 360 LEDs

**30W** VT-2216  
**EAN Code** 3800157642033 3000K  
 3800157642040 4000K  
 3800157642057 6400K



LED Type:	SMD	lm/M:	2400lm
Watt/M:	30w	lm/LED:	6-7lm
Current/M:	1.25A	Beam Angle:	120°
Voltage:	DC:24V	IP Rating:	IP20
LED Qty	360	Width:	10mm

DESCRIPTION	ORDER NO.
2216 360-LED STRIP LIGHT WITH-IP20-3000K 24V CRI>95	LIVT2580
2216 360-LED STRIP LIGHT WITH-IP20-4000K 24V CRI>95	LIVT2581
2216 360-LED STRIP LIGHT WITH-IP20-6400K 24V CRI>95	LIVT2582






## Led Stripslights

**15W** VT-10-240  
**EAN Code** 3800157634564 3000K  
 3800157634571 4000K  
 3800157634588 6400K



LED Type:	SMD 2835	lm/M:	1600lm
Watt/M:	-	lm/LED:	-
Current/M:	-	Beam Angle:	120°
Voltage:	DC:24V	IP Rating:	IP20
LED Qty	-	Width:	10mm

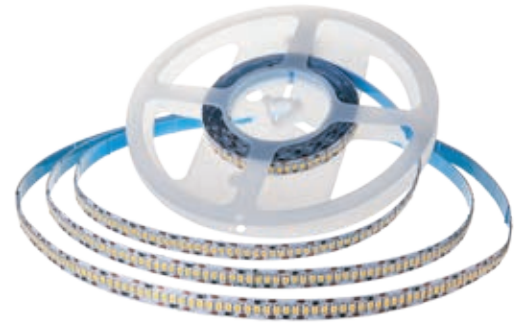

DESCRIPTION	ORDER NO.
240 2835 LED STRIP LIGHT WITH SAMSUNG CHIP 3000K IP20 10M	LIVTS320
240 2835 LED STRIP LIGHT WITH SAMSUNG CHIP 4000K IP20 10M	LIVTS321
240 2835 LED STRIP LIGHT WITH SAMSUNG CHIP 6400K IP20 10M	LIVTS322

## Led Stripslights

**12W** VT-5-120  
**EAN Code** 3800157637213 3000K  
 3800157637220 4000K  
 3800157635523 6500K



LED Type:	SMD 2835	lm/M:	1200lm
Watt/M:	-	lm/LED:	-
Current/M:	-	Beam Angle:	120°
Voltage:	DC:12V	IP Rating:	IP20
LED Qty	-	Width:	10mm



DESCRIPTION	ORDER NO.
2835 LED STRIP LIGHT WITH SAMSUNG CHIP 3000K IP20 5M 12V	LIVTS323
2835 LED STRIP LIGHT WITH SAMSUNG CHIP 4000K IP20 5M 12V	LIVTS324
2835 LED STRIP LIGHT WITH SAMSUNG CHIP 6500K IP20 5M 12V	LIVTS325

## Stripslights

**18W** VT-2835  
**EAN Code** 3800157653152 3000K  
 3800157653169 4000K  
 3800157653176 6400K

**CRI >95**



LED Type:	SMD 2835	lm/M:	1800lm
Watt/M:	-	lm/LED:	-
Current/M:	-	Beam Angle:	120°
Voltage:	DC:24V	IP Rating:	IP20
LED Qty	-	Width:	10mm



DESCRIPTION	ORDER NO.
2835 240-LED STRIP LIGHT-24V-IP20-3000K CRI >95 SAMSUNG CHIP 10M	LIVTS331
2835 240-LED STRIP LIGHT-24V-IP20-4000K CRI >95 SAMSUNG CHIP 10M	LIVTS332
2835 240-LED STRIP LIGHT--24V-IP20-6400K CRI >95 SAMSUNG CHIP 10M	LIVTS333



## Strip-Controller-Dimmer

VT-2402

EAN Code 3800230622198



Max Current /Watt: 8A, 96/192W

Input Voltage: DC:12/24V

DESCRIPTION	ORDER NO.
DIMMER FOR LED STRIP WITH REMOTE	LIVT3300

## Strip-Amplifier

VT-2407

EAN Code 3800157620819



Input Voltage: DC:12/24V

DESCRIPTION	ORDER NO.
RGB AMPLIFIER	LIVT3309

## LED Sync Controller- Dimmer

VT-2414

EAN Code 3800157634601



Input Voltage: DC:12/24V

DESCRIPTION	ORDER NO.
LED SYNC DIMMER WITH RF 14B REMOTE CONTROL	LIVT3337

## LED Sync Controller- RGB

VT-2420

EAN Code 3800157634625



Input Voltage: DC:12/24V

DESCRIPTION	ORDER NO.
LED RGB CONTROLLER WITH 20 KEY RF REMOTE CONTROL	LIVT3339

## Strip-Controller-Infrared

VT-2472

3800230629630



### Infrared Controller with Remote Control 24 Buttons

Max Current /Watt: 72/144w

Input Voltage: DC:12/24V

DESCRIPTION	ORDER NO.
72W INFRARED CONTROLLER WITH REMOTE CONTROL 24 BUTTONS ROUND	LIVT3625

## Power Supply-Metal

VT-20026

EAN Code 3800157622929



100% load tested

Watts:	25w
Current Capacity:	2.1A
Input Power:	AC:85-265V,50/60Hz
Output:	DC:12V
Unit Size:	140x33x27mm

DESCRIPTION	ORDER NO.
25W LED POWER SUPPLY 12V 2.1A IP20 SLIM	LIVT3228

## LED Power Supply-Rainproof-IP45

VT-21151

EAN Code 3800157627979



Watts:	150w
Current Capacity:	12.5A
Input Power:	AC:100-264V,50/60Hz
Output:	DC:12V
Unit Size:	207x74x42mm



DESCRIPTION	ORDER NO.
150W LED RAINPROOF POWER SUPPLY 12V IP45	LIVT3231

## LED Power Supply-Rainproof-IP45

VT-21251

EAN Code 3800157627986



Watts:	250w
Current Capacity:	20A
Input Power:	AC:100-264V,50/60Hz
Output:	DC:12V
Unit Size:	218x95x50mm



DESCRIPTION	ORDER NO.
250W LED RAINPROOF POWER SUPPLY 12V IP45	LIVT3232

## LED Power Supply-Rainproof-IP45

VT-21401

EAN Code 3800157627993



Watts:	400w
Current Capacity:	33A
Input Power:	AC:100-264V,50/60Hz
Output:	DC:12V
Unit Size:	223x118x50mm




DESCRIPTION	ORDER NO.
400W LED RAINPROOF POWER SUPPLY 12V IP45	LIVT3233

## Slim Power Supply

VT-20062

EAN Code 3800157628549

Watts:	60w
Current Capacity:	5A
Input Power:	AC:85-265V,50/60Hz
Output:	DC:12V
Unit Size:	130x50x31mm

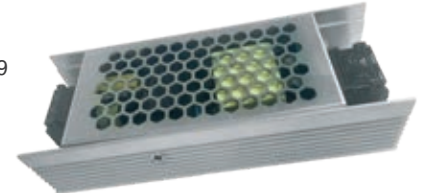

DESCRIPTION	ORDER NO.
60W LED SLIM POWER SUPPLY 12V 5A IP20	LIVT3246


## Slim Power Supply

VT-20077

EAN Code 3800157628556

**With short circuit protection, over load protection, stable output voltage**

Watts:	75w
Current Capacity:	6A
Input Power:	AC:85-265V,50/60Hz
Output:	DC:12V
Unit Size:	130x50x31mm

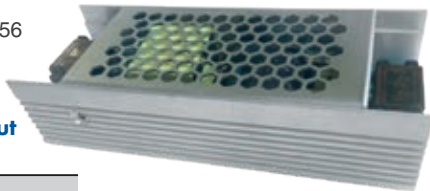

DESCRIPTION	ORDER NO.
75W LED SLIM POWER SUPPLY 12V 6A IP20	LIVT3247


## Slim Power Supply

VT-20122

3800157628525

**Built in EMI Filter**

Watts:	120w
Current Capacity:	10A
Input Power:	AC:85-265V,50/60Hz
Output:	DC:12V
Unit Size:	190x50x31mm

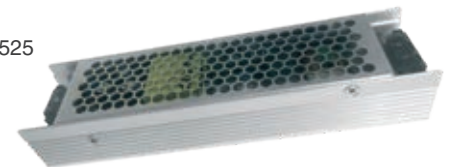

DESCRIPTION	ORDER NO.
120W LED SLIM POWER SUPPLY 12V 10A IP20	LIVT3243


## Slim Power Supply

VT-20152

EAN Code 3800157628532

High efficiency, low temperature

Watts:	150w
Current Capacity:	12.5A
Input Power:	AC:85-265V,50/60Hz
Output:	DC:12V
Unit Size:	200x62x31mm



DESCRIPTION	ORDER NO.
150W LED SLIM POWER SUPPLY 12V 12.5A IP20	LIVT3244

## LED Power Supply-TRIAC Dimmable

VT-20101D

EAN Code 3800157635523



Watts:	100w
Current Capacity:	8.5A
Input Power:	AC:200-240V,50/60Hz
Output:	DC:12V
Unit Size:	199x98x42mm



DESCRIPTION	ORDER NO.
100W-LED POWER SUPPLY ( TRIAC DIMMABLE )-12V 8.5A-IP20	LIVT3256

## LED Power Supply-TRIAC Dimmable

VT-20154D

EAN Code 3800157635530



Watts:	150w
Current Capacity:	12.5A
Input Power:	AC:200-240V,50/60Hz
Output:	DC:12V
Unit Size:	199x98x42mm



DESCRIPTION	ORDER NO.
150W-LED POWER SUPPLY ( TRIAC DIMMABLE )-12V-12.5A-IP20	LIVT3257

## LED Power Supply-TRIAC Dimmable

VT-20155D

EAN Code 3800157635547



Watts:	150w
Current Capacity:	6.25A
Input Power:	AC:200-240V,50/60Hz
Output:	DC:24V
Unit Size:	199x98x42mm



DESCRIPTION	ORDER NO.
150W-LED POWER SUPPLY ( TRIAC DIMMABLE )-24V-6.25A-IP20	LIVT3258

## Power Supply-Plastic-IP44

VT-23019

EAN Code 3800157628037



Watts:	18w
Current Capacity:	1.5A
Input Power:	AC:100-264V,50/60Hz
Output:	DC:12V
Unit Size:	73x27x43mm



DESCRIPTION	ORDER NO.
18W LED PLASTIC POWER SUPPLY 12V 1.5A IP44	LIVT3237

## Power Supply-Plastic-IP44

VT-23031

EAN Code 3800157628044



Watts:	30w
Current Capacity:	2.5A
Input Power:	AC:100-264V,50/60Hz
Output:	DC:12V
Unit Size:	119x52x32mm



DESCRIPTION	ORDER NO.
30W LED PLASTIC POWER SUPPLY 12V 2.5A IP44	LIVT3238

## Power Supply-Plastic-IP44

VT-23061

EAN Code 3800157628051



Watts:	60w
Current Capacity:	5A
Input Power:	AC:100-264V,50/60Hz
Output:	DC:12V
Unit Size:	119x52x32mm

DESCRIPTION	ORDER NO.
60W LED PLASTIC POWER SUPPLY 12V 5A IP44	LIVT3239

## Power Supply-Plastic-IP44

VT-23043

EAN Code 3800157629379



Watts:	42w
Current Capacity:	3.5A
Input Power:	AC:100-265V,50/60Hz
Output:	DC:12V
Unit Size:	119x52x32mm

DESCRIPTION	ORDER NO.
42W LED PLASTIC POWER SUPPLY 12V 3.5A IP44	LIVT3249

## Power Supply-Plastic-IP44

VT-23079

EAN Code 3800157628068



Watts:	78w
Current Capacity:	6.5A
Input Power:	AC:100-264V,50/60Hz
Output:	DC:12V
Unit Size:	119x52x32mm

DESCRIPTION	ORDER NO.
78W LED PLASTIC POWER SUPPLY 12V 6.5A IP44	LIVT3240

## Power Supply-Waterproof-IP67

VT-22155

EAN Code 3800157630436



Watts:	150w
Current Capacity:	12.5A
Input Power:	AC:100-264V,50/60Hz
Output:	DC:12V
Unit Size:	192x52x32mm

DESCRIPTION	ORDER NO.
150W-LED SLIM POWER SUPPLY-IP67- 12V WITH 5 YRS WARRANTY	LIVT3250

## Power Supply-Waterproof-IP67

VT-22065

EAN Code 3800157630450



Watts:	60w
Current Capacity:	5A
Input Power:	AC:100-264V,50/60Hz
Output:	DC:12V
Unit Size:	192x52x32mm

DESCRIPTION	ORDER NO.
60W-LED PLASTIC SLIM POWER SUPPLY-IP67- 12V WITH 5 YRS WARRANTY	LIVT3252

## Power Supply-Waterproof-IP67

VT-22105

EAN Code 3800157630443



Watts:	100w
Current Capacity:	8.3A
Input Power:	AC:100-264V,50/60Hz
Output:	DC:12V
Unit Size:	192x52x32mm

DESCRIPTION	ORDER NO.
100W-LED PLASTIC SLIM POWER SUPPLY-IP67- 12V WITH 5 YRS WARRANTY	LIVT3251





# LED Bulbs

We offer an extensive collection of LED Bulbs which are designed as a retrofit for most of the standard lighting fixtures with a wide variety of wattages ranging from 3w to 20w.

## Applications

Perfect choice for Hotels, Bars, Commercial & Residential Lighting and Exhibition Stands.


- Lasts 20 times longer than Standard Bulbs
- Broad Range of holders like E27, E14, B22, B15, G24 and R7S
- Uses 80% less energy than Standard Bulbs
- Excellent Heat Radiation Efficiency
- Customized exterior for stronger body
- High Power LED Chips
- Non – Flickering
- Dimmable & Non Dimmable options





### Classic E27 LED Plastic Bulbs

**9W** VT-210  
 EAN Code 3800157631938 3000K  
 3800157631945 4000K



**806** Lumens | 
 **60w** EQ.Watts | 
 **E27** Base | 
 **A58** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50Hz	SMD	200°	Thermoplastic	58x106mm	30,000 Hours	100

#### DESCRIPTION


#### ORDER NO.

9W A60 PLASTIC BULB WITH SAMSUNG CHIP 3000K E27	LIVTS228
9W A60 PLASTIC BULB WITH SAMSUNG CHIP 4000K E27	LIVTS229



### Classic E27 LED Plastic Bulbs

**11W** VT-212  
 EAN Code 3800157631969 3000K  
 3800157631976 4000K



**1055** Lumens | 
 **75w** EQ.Watts | 
 **E27** Base | 
 **A60** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50 /60 Hz	SMD	200°	Thermoplastic	60x106mm	30,000 Hours	100

#### DESCRIPTION


#### ORDER NO.

11W A60 PLASTIC BULB WITH SAMSUNG CHIP 3000K E27	LIVTS231
11W A60 PLASTIC BULB WITH SAMSUNG CHIP 4000K E27	LIVTS232



### Classic E27 LED Plastic Bulbs

**15W** VT-215  
 EAN Code 3800157627726 3000K  
 3800157627733 4000K  
 3800157627740 6400K



**1250** Lumens | 
 **85w** EQ.Watts | 
 **E27** Base | 
 **A65** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	200°	Thermoplastic	66.5x134mm	30,000 Hours	100

#### DESCRIPTION


#### ORDER NO.

15W E27 A65 LED PLASTIC BULB SAMSUNG CHIP 3000K	LIVTS159
15W A65 LED PLASTIC BULB-SAMSUNG CHIP 4000K E27	LIVTS160
15W A65 LED PLASTIC BULB-SAMSUNG CHIP 6400K E27	LIVTS161



## Classic E27 LED Plastic Bulbs

**17W** VT-217  
**EAN Code** 3800157627757 3000K  
 3800157627764 4000K  
 3800157627771 6400K



**1521** Lumens |
 **100w** EQ.Watts |
 **E27** Base |
 **A65** Type |
 **>80** CRI |
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	200°	Thermoplastic	66.5x134mm	30,000 Hours	100

DESCRIPTION	ORDER NO.
17W E27 A65 LED BULB SAMSUNG CHIP 3000K 200° D	LIVTS162
17W A65 LED BULB-SAMSUNG CHIP 4000K E27 200° D	LIVTS163
17W A65 LED BULB-SAMSUNG CHIP 6400K E27 200° D	LIVTS164



## E27 - LED Plastic Bulbs

**5.5W** VT-246  
**EAN Code** 3800157627870 3000K  
 3800157627887 4000K



**470** Lumens |
 **40w** EQ.Watts |
 **E27** Base |
 **G45** Type |
 **>80** CRI |
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	180°	Thermoplastic	Ø45x81mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
5.5W E27 G45 PLASTIC BULBS SAMSUNG CHIP 3000K	LIVTS174
5.5W G45 PLASTIC BULBS-SAMSUNG CHIP 4000K E27	LIVTS175



## E27 - LED Plastic Bulbs

**7W** VT-290  
**EAN Code** 3800157640114 3000K  
 3800157627559 4000K



**600** Lumens |
 **45w** EQ.Watts |
 **E27** Base |
 **G45** Type |
 **>80** CRI |
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	180°	Thermoplastic	Ø45x81mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
7W G45 PLASTIC BULB WITH SAMSUNG CHIP 3000K E27	LIVTS866
7W G45 PLASTIC BULB WITH SAMSUNG CHIP 4000K E27	LIVTS867



### Classic E27 LED Bulbs

**5.5W** VT-1879  
**EAN Code** 3800157629485 2700K  
 3800157629492 4000K



**470** Lumens | 
 **40w** EQ.Watts | 
 **E27** Base | 
 **G45** Type | 
 **>80** CRI | 
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50Hz	SMD	180°	Thermoplastic	45x82mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
5.5W G45 PLASTIC BULBS 2700K E27	LIVT7407
5.5W G45 PLASTIC BULBS 4000K E27	LIVT7408



### E27 - Bulbs-G45-CRI>95

**5.5W** VT-2216  
**EAN Code** 3800157651141 2700K  
 3800157651158 4000K



**470** Lumens | 
 **40w** EQ.Watts | 
 **E27** Base | 
 **G45** Type | 
 **>95** CRI | 
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	180°	Thermoplastic	Ø45x81mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
G45-E27-5.5W-PLASTIC BULB-2700K -CRI 95 +	LIVT7491
G45-E27-5.5W-PLASTIC BULB-4000K -CRI 95 +	LIVT7492



### Classic E27 LED Plastic Bulbs

**9W** VT-2099  
**EAN Code** 3800157622110 3000K  
 3800157622127 4000K



**806** Lumens | 
 **60w** EQ.Watts | 
 **E27** Base | 
 **A60** Type | 
 **>80** CRI | 
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50 /60 Hz	SMD	200°	Thermoplastic	60x112mm	30,000 Hours	100

DESCRIPTION	ORDER NO.
9W A60 THERMAL PLASTIC BULBS E27 3000K	LIVT7260
9W A60 THERMAL PLASTIC BULBS E27 4000K	LIVT7261



### Classic E27 LED Plastic Bulbs

**11W** VT-2112  
**EAN Code** 3800157627399 3000K  
 3800157627320 4000K



**1055** Lumens | 
 **75w** EQ.Watts | 
 **E27** Base | 
 **A60** Type | 
 **>80** CRI | 
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	200°	Thermoplastic	60x120mm	30,000 Hours	100

DESCRIPTION	ORDER NO.
11W A60 E27 LED PLASTIC BULB 3000K	LIVT7350
11W E27 A60 LED PLASTIC BULB 4000K	LIVT7349



### Classic E27 LED Bulbs

**15W** VT-2015  
**EAN Code** 3800157608091 3000K  
 3800157608107 4000K



**1350** Lumens | 
 **90w** EQ.Watts | 
 **E27** Base | 
 **A65** Type | 
 **>80** CRI | 
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50Hz	SMD	200°	Thermoplastic	66.5x134mm	30,000 Hours	100

DESCRIPTION	ORDER NO.
BULB 15W A65 E27 THERMOPLASTIC 1500LM 200D 3000K	LIVT4453
BULB 15W A65 E27 THERMOPLASTIC 200D 4500K	LIVT4454



### Classic E27 LED Plastic Bulbs

**18W** VT-2218  
**EAN Code** 3800157641838 3000K  
 3800157641845 4000K



**2000** Lumens | 
 **125w** EQ.Watts | 
 **E27** Base | 
 **A80** Type | 
 **>80** CRI | 
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	200°	Thermoplastic	80x142mm	30,000 Hours	50

DESCRIPTION	ORDER NO.
A80-E27-18W-PLASTIC BULB-3000K	LIVT2707
A80-E27-18W-PLASTIC BULB-4000K	LIVT2708



### Classic E27 LED Plastic Bulbs

**20W** VT-2220  
 EAN Code 3800157643917 3000K



**2452** Lumens | 
 **150w** EQ.Watts | 
 **E27** Base | 
 **A80** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	200°	Thermoplastic	80x149mm	30,000 Hours	100

#### DESCRIPTION

#### ORDER NO.

A80-E27-20W-PLASTIC BULB-3000K

LIVT2710



### Classic E27 Bulbs-A60-CRI>95

**12W** VT-2213  
 EAN Code 3800157651103 2700K



**1055** Lumens | 
 **75w** EQ.Watts | 
 **E27** Base | 
 **A60** Type | 
 **>95** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50Hz	SMD	200°	Thermoplastic	60x120mm	30,000 Hours	100

#### DESCRIPTION

#### ORDER NO.

A60-E27-12W-PLASTIC BULB-2700K

LIVT7482


A60-E27-12W-PLASTIC BULB-4000K

LIVT7483



### Classic E27 Bulbs-A65 -CRI>95

**17W** VT-2217  
 EAN Code 3800157640718 2700K  
 3800157640725 4000K



**1521** Lumens | 
 **100w** EQ.Watts | 
 **E27** Base | 
 **A65** Type | 
 **>95** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	200°	Thermoplastic	65x135mm	30,000 Hours	100

#### DESCRIPTION

#### ORDER NO.

A65-E27-17W-PLASTIC BULB-2700K

LIVT7485

A65-E27-17W-PLASTIC BULB-4000K


LIVT7486





### Candle shape E14 - Bulbs-Candle-CRI>95

**5.5W** VT-2226  
**EAN Code** 3800157651172 2700K  
 3800157651189 4000K



**470** Lumens | 
 **40w** EQ.Watts | 
 **E14** Base | 
 **Candle** Type | 
 **>95** CRI | 
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	200°	ThermoPlastic	37x100mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
C37-E14-5.5W-PLASTIC CANDLE BULB-2700K -CRI 95 +	LIVT7494
C37-E14-5.5W-PLASTIC CANDLE BULB-4000K -CRI 95 +	LIVT7495



### Candle shape E14 - Bulbs-Candle

**4W** VT-1818 TP  
**EAN Code** 3800230620743 2700K  
 3800230620736 4000K



**320** Lumens | 
 **30w** EQ.Watts | 
 **E14** Base | 
 **Candle** Type | 
 **>80** CRI | 
 **>0.4** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	200°	ThermoPlastic	37x124mm	>20,000 Hours	200

DESCRIPTION	ORDER NO.
BULB 4W E14 CANDLE FLAME 2700K	LIVT4164
BULB 4W E14 CANDLE FLAME 4500K	LIVT4156



### Classic E14 Bulbs-P45-CRI>95

**5.5W** VT-2236  
**EAN Code** 3800157640749 2700K  
 3800157640756 4000K



**470** Lumens | 
 **40w** EQ.Watts | 
 **E14** Base | 
 **P45** Type | 
 **>95** CRI | 
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	180°	Thermoplastic	45x81mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
P45-E14-5.5W-PLASTIC BULB-2700K -CRI95 +	LIVT7488
P45-E14-5.5W-PLASTIC BULB-4000K -CRI 95 +	LIVT7489



### Candle shape E14 - LED Plastic Bulbs

**5.5W** VT-226  
 EAN Code 3800157627849 3000K  
 3800157627856 4000K



**470**  
Lumens



**40w**  
EQ.Watts



**E14**  
Base



**Candle**  
Type



**>80**  
CRI



**>0.5**  
PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	200°	Thermoplastic	37x100mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
5.5W E14 C37 LED CANDLE BULBS SAMSUNG CHIP 3000K	LIVTS171
5.5W C37 LED CANDLE BULBS-SAMSUNG CHIP 4000K E14	LIVTS172



### Candle shape E14 - LED Plastic Bulbs

**5.5W** VT-VT-293D  
 EAN Code 3800157655095 3000K



**470**  
Lumens



**40w**  
EQ.Watts



**E14**  
Base



**Candle**  
Type



**>80**  
CRI



**>0.5**  
PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	200°	Plastic	37x100mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
5.5W E14 C37 LED CANDLE BULBS SAMSUNG CHIP 3000K	LIVTS20045



### Candle shape E14 - LED Plastic Bulbs

**7W** VT-268  
 EAN Code 3800157637107 3000K  
 3800157637114 4000K



**600**  
Lumens



**45w**  
EQ.Watts



**E14**  
Base



**Candle**  
Type



**>80**  
CRI



**>0.5**  
PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	200°	Plastic	37x100mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
7W PLASTIC CANDLE BULB WITH SAMSUNG CHIP 3000k E14	LIVTS111
7W PLASTIC CANDLE BULB WITH SAMSUNG CHIP 4000k E14	LIVTS112



## Candle shape E14 - LED Plastic Bulbs

**5.5W** VT-258  
**EAN Code** 3800157637169 3000K  
 3800157637176 4000K



**470** Lumens |
 **40w** EQ.Watts |
 **E14** Base |
 **Candle** Type |
 **>80** CRI |
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50Hz	SMD	3200°	Plastic	37x124mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
5.5W PLASTIC CANDLE FLAME BULB WITH SAMSUNG CHIP 3000K E14	LIVTS117
5.5W PLASTIC CANDLE FLAME BULB WITH SAMSUNG CHIP 4000K E14	LIVTS118



## E14 - LED Plastic Bulbs

**5.5W** VT-236  
**EAN Code** 3800157627818 3000K  
 3800157627825 4000K  
 3800157627832 6400K



**470** Lumens |
 **40w** EQ.Watts |
 **E14** Base |
 **P45** Type |
 **>80** CRI |
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	180°	Thermoplastic	Ø45x81mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
5.5W E14 P45 PLASTIC BULBS-SAMSUNG CHIP 3000K	LIVTS168
5.5W P45 PLASTIC BULBS-SAMSUNG CHIP 4000K E14	LIVTS169
5.5W E14 P45 PLASTIC BULBS-SAMSUNG CHIP 6400K	LIVTS170



## E14 - LED Plastic Bulbs

**7W** VT-270  
**EAN Code** 3800157640084 3000K  
 3800157640091 4000K



**600** Lumens |
 **45w** EQ.Watts |
 **E14** Base |
 **P45** Type |
 **>80** CRI |
 **>0.5** PF



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	180°	Thermoplastic	Ø45x81mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
7W P45 PLASTIC BULB WITH SAMSUNG CHIP 3000K E14	LIVTS863
7W P45 PLASTIC BULB WITH SAMSUNG CHIP 4000K E14	LIVTS864

## E14 - LED Reflector Bulb



**6W** VT-250  
**EAN Code** 3800157627511 3000K  
 3800157627528 4000K



**470** Lumens | 
 **40w** EQ.Watts | 
 **E14** Base | 
 **R50** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	120°	Thermoplastic	Ø50x86mm	30,000 Hours	200

### DESCRIPTION

### ORDER NO.

6W E14 R50 LED BULBS SAMSUNG CHIP 3000K

LIVTS138


6W R50 LED BULBS-SAMSUNG CHIP 4000K E14

LIVTS139

## E27 - LED Reflector Bulb



**8W** VT-263  
**EAN Code** 3800157627542 3000K  
 3800157627559 4000K



**570** Lumens | 
 **60w** EQ.Watts | 
 **E27** Base | 
 **R63** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	120°	Thermoplastic	Ø63x100mm	30,000 Hours	200

### DESCRIPTION

### ORDER NO.

8W E27 R63 LED BULB SAMSUNG CHIP 3000K

LIVTS141


8W R63 LED BULBS-SAMSUNG CHIP 4000K E27

LIVTS142

## E27 - LED Reflector Bulb



**10W** VT-280  
**EAN Code** 3800157627481 3000K  
 3800157627498 4000K



**800** Lumens | 
 **75w** EQ.Watts | 
 **E27** Base | 
 **R80** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	120°	Thermoplastic	Ø80x114mm	30,000 Hours	200

### DESCRIPTION

### ORDER NO.

10W E27 R80 LED BULB SAMSUNG CHIP 3000K

LIVTS135


10W R80 LED BULB-SAMSUNG CHIP 4000K E27

LIVTS136

## E27 - PAR Bulbs



**11W** VT-230  
**EAN Code** 3800157627665 3000K  
 3800157627672 4000K



**825** Lumens | 
 **95w** EQ.Watts | 
 **E27** Base | 
 **PAR30** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	40°	Thermoplastic	Ø95x117mm	30,000 Hours	30

### DESCRIPTION

### ORDER NO.

LED BULB 11W E27 PAR30 BULB SAMSUNG CHIP 3000K

LIVTS153

LED BULB 11W E27 PAR30 BULB SAMSUNG CHIP 4000K

LIVTS154

## E27 - PAR Bulbs



**14W** VT-238  
**EAN Code** 3800157627634 3000K  
 3800157627641 4000K



**1100** Lumens | 
 **120w** EQ.Watts | 
 **E27** Base | 
 **PAR38** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	40°	Thermoplastic	Ø120x132mm	30,000 Hours	30

### DESCRIPTION

### ORDER NO.

14W E27 LED PAR38 BULB SAMSUNG CHIP 3000K

LIVTS150


14W E27 LED PAR38 BULB SAMSUNG CHIP 4000K

LIVTS151

## Candle shape E14- Clear - Filament- Candle



**4W** VT-254  
**EAN Code** 3800157634199 2700K



**400** Lumens | 
 **35w** EQ.Watts | 
 **E14** Base | 
 **Candle** Type | 
 **>80** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50/60Hz	SMD	300°	Glass	35x100mm	30,000 Hours	100

### DESCRIPTION

### ORDER NO.

4W CANDLE FILAMENT BULB-CLEAR COVER WITH SAMSUNG CHIP 2700K E14


LIVTS272





### Classic E27 Clear Glass-Filament-A60

**4W** VT-1885  
**EAN Code** 3800230627179 2700K  
 3800157609951 4000K



**400** Lumens | 
 **40w** EQ.Watts | 
 **E27** Base | 
 **A60** Type | 
 **>80** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	60x107mm	>20,000 Hours	50

#### DESCRIPTION

#### ORDER NO.

BULB 4W E27 A60 FILAMENT 2700K

LIVT4259


BULB 4W E27 A60 FILAMENT CLEAR COVER 4000K

LIVT7119



### Classic E27 Clear Glass-Filament-A67

**8W** VT-1978  
**EAN Code** 3800157606165 3000K  
 3800157606172 4000K



**800** Lumens | 
 **60w** EQ.Watts | 
 **E27** Base | 
 **A67** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	67x123mm	30,000 Hours	100

#### DESCRIPTION

#### ORDER NO.

BULB 8W E27 A67 FILAMENT 3000K

LIVT4407

BULB 8W E27 A67 FILAMENT 4000K

LIVT4408



### Classic E27 Clear Glass-Filament-A67

**10W** VT-1981  
**EAN Code** 3800157606196 3000K



**1055** Lumens | 
 **75w** EQ.Watts | 
 **E27** Base | 
 **A67** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50Hz	Filament	300°	Glass	67x123mm	>20,000 Hours	50

#### DESCRIPTION

#### ORDER NO.



BULB 10W E27 A67 FILAMENT 3000K

LIVT4410



### Classic E27 Clear Filament-A70

**12.5W** VT-2133  
**EAN Code** 3800157637879 3000K  
 3800157637886 4000K



**1550** Lumens | 
 **100w** EQ.Watts | 
 **E27** Base | 
 **A70** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50/60Hz	Filament	330°	Glass	70x132mm	>20,000 Hours	50

#### DESCRIPTION

#### ORDER NO.



12.5W A70 LED FILAMENT BULB-CLEAR COVER WITH COLOROCDE:3000K E27 LVT7458

12.5W A70 LED FILAMENT BULB-CLEAR COVER WITH COLOROCDE:4000K E27 LVT7459



### Classic E27 Clear Filament-A67

**18W** VT-2328  
**EAN Code** 3800157652568 3000K



**2520** Lumens | 
 **150w** EQ.Watts | 
 **E27** Base | 
 **A67** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50/60Hz	Filament	330°	Glass	67x123mm	20,000 Hours	50

#### DESCRIPTION

#### ORDER NO.



18W A67 LED FILAMENT BULB 2700K E27(140LM/WATT)

LVT2802



### Classic E27 Filament-ST64

**4W** VT-1964  
**EAN Code** 3800157602747 2200K



**350** Lumens | 
 **40w** EQ.Watts | 
 **E27** Base | 
 **ST64** Type | 
 **>95** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50Hz	Filament	300°	Glass	64x138mm	20,000 Hours	50

#### DESCRIPTION

#### ORDER NO.


BULB 4W E27 ST64 FILAMENT AMBER COVER 2200K

LVT4361



### E27 - Clear Glass-Filament-Globe

**4W** VT-1980  
**EAN Code** 3800157606417 4000K



**400** Lumens | 
 **40w** EQ.Watts | 
 **E27** Base | 
 **G45** Type | 
 **>80** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	Ø45x75mm	>20,000 Hours	100

#### DESCRIPTION

#### ORDER NO.



BULB 4W E27 G45 FILAMENT 4000K

LIVT4427



### E14 - Clear Glass-Filament-P45

**4W** VT-1996  
**EAN Code** 3800230629944 2700K



**400** Lumens | 
 **40w** EQ.Watts | 
 **E14** Base | 
 **P45** Type | 
 **>80** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	Ø45x77mm	>20,000 Hours	100

#### DESCRIPTION

#### ORDER NO.



BULB 4W E14 P45 FILAMENT 2700K

LIVT4300



### E14 - Clear Glass-Filament-P45

**4W** VT-1996D  
**EAN Code** 3800157604314 2700K



**320** Lumens | 
 **30w** EQ.Watts | 
 **E14** Base | 
 **P45** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	Ø45x77mm	>20,000 Hours	100

#### DESCRIPTION


#### ORDER NO.

BULB 4W E14 P45 FILAMENT 2700K DIMMABLE

LIVT4394

## Decorative Bulbs E14 - Amber Cover -Filament-Candle

**4W** VT-1955  
EAN Code 3800157609883 2200K



**350** Lumens | 
 **40w** EQ.Watts | 
 **E27** Base | 
 **Candle** Type | 
 **>80** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	35x100mm	20,000 Hours	100

### DESCRIPTION


### ORDER NO.

BULB 4W E14 FILAMENT CANDLE AMBER COVER 2200K

LIVT7113

## Candle shape E14-Clear Glass-Filament-Candle

**6W** VT-2127  
EAN Code 3800157632577 3000K



**600** Lumens | 
 **45w** EQ.Watts | 
 **E14** Base | 
 **Candle** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	35x100mm	30,000 Hours	200

### DESCRIPTION


### ORDER NO.

6W CANDLE FILAMENT BULB-CLEAR COVER 3000K E14

LIVT7423

## Candle shape E14 - Clear Glass-Filament-Candle

**4W** VT-1997  
EAN Code 3800230629968 2700K  
3800157606431 4000K



**400** Lumens | 
 **40w** EQ.Watts | 
 **E14** Base | 
 **Candle** Type | 
 **>80** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50Hz	Filament	300°	Glass	35x121mm	> 20,000 Hours	50

### DESCRIPTION

### ORDER NO.

BULB 4W E14 FILAMENT CANDLE FLAME 3000K

LIVT4302


BULB 4W E14 FILAMENT CANDLE FLAME 4500K

LIVT4429



### Candle shape E14 - Clear Glass-Filament-Candle

**4W** VT-1997D  
 EAN Code 3800157602921 2700K



**320**  
Lumens



**30w**  
EQ.Watts



**E14**  
Base



**Candle**  
Type



**>80**  
CRI



**>0.5**  
PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50Hz	Filament	300°	Glass	35x121mm	> 20,000 Hours	100

#### DESCRIPTION

#### ORDER NO.



BULB 4W E14 FILAMENT CANDLE FLAME 3000K DIMMABLE

LIVT4366



### Candle shape E14 - Frost Cover -Filament-Candle

**4W** VT-2056D  
 EAN Code 3800157615532 2700K



**350**  
Lumens



**35w**  
EQ.Watts



**E14**  
Base



**Candle**  
Type



**>80**  
CRI



**>0.4**  
PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50 /60 Hz	Filament	300°	Glass	35x121mm	20,000 Hours	100

#### DESCRIPTION

#### ORDER NO.


4W CANDLE FILAMENT DIMMABLE FROST COVER BULB WITH TIP 2700K E14

LIVT7177



### Candle shape E14 - Frost Cover -Filament-Candle

**4W** VT-1937  
 EAN Code 3800157609111 2700K



**400**  
Lumens



**40w**  
EQ.Watts



**E14**  
Base



**Candle**  
Type



**>80**  
CRI



**>0.4**  
PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	35x121mm	>20,000 Hours	200

#### DESCRIPTION

#### ORDER NO.

BULB 4W E14 FILAMENT FROST COVER CANDLE TAIL 2700K

LIVT4477





### Candle shape E27 - Frost Cover -Filament-A60

**4W** VT-1934  
 EAN Code 3800157609630 6400K



**400** Lumens | 
 **40w** EQ.Watts | 
 **E27** Base | 
 **A60** Type | 
 **>80** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	60x107mm	20,000 Hours	50

#### DESCRIPTION

#### ORDER NO.

BULB 4W E27 A60 FILAMENT FROST COVER 6400K

LIVT4488



### E27 - Frost Cover -Filament-Globe

**7W** VT-2067  
 EAN Code 3800157615655 3000K



**840** Lumens | 
 **60w** EQ.Watts | 
 **E27** Base | 
 **G125** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	Ø125x177mm	20,000 Hours	12

#### DESCRIPTION

#### ORDER NO.

LED BULB 7W E27 G125 FILAMENT FROST COVER 2700K

LIVT7189



### E27 - Frost Cover -Filament-Globe

**7W** VT-2067D  
 EAN Code 3800157615679 2700K



**750** Lumens | 
 **55w** EQ.Watts | 
 **E27** Base | 
 **G125** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50/60Hz	Filament	300°	Glass	Ø125x177mm	>20,000 Hours	12

#### DESCRIPTION

#### ORDER NO.



7W G125 E27 FILAMENT FROST COVER BULB 2700K

LIVT7191



### E27 - Clear Glass-Filament-Globe

**18W** VT-2338  
EAN Code 3800157652575 3000K



**2520** Lumens | 
 **150w** EQ.Watts | 
 **E27** Base | 
 **G95** Type | 
 **>80** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V	Filament	330°	Glass	Ø95x135mm	>20,000 Hours	100

#### DESCRIPTION

#### ORDER NO.


18W G95 LED FILAMENT BULB 3000K E27(140LM/WATT)

LIVT2803



### E27 - Clear Glass-Filament-Globe

**4W** VT-1994D  
EAN Code 3800157605021 2700K



**320** Lumens | 
 **30w** EQ.Watts | 
 **E27** Base | 
 **G125** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	Ø125x177mm	>20,000 Hours	20

#### DESCRIPTION

#### ORDER NO.

LED BULB 4W FILAMENT PATENT E27 G125 WARM WHITE DIMMABLE

LIVT4399



### E27 - Clear Glass-Filament-Globe

**12.5W** VT-2143  
EAN Code 3800157637824 3000K  
3800157637848 4000K



**1550** Lumens | 
 **100w** EQ.Watts | 
 **E27** Base | 
 **G125** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	330°	Glass	Ø125x177mm	>20,000 Hours	25

#### DESCRIPTION

#### ORDER NO.

12.5W G125 LED FILAMENT BULB-CLEAR COVER WITH COLOROCDE:3000K E27 LIVT7453

12.5W G125 LED FILAMENT BULB-CLEAR COVER WITH COLOROCDE:4000K E27 LIVT7454

## G4-Capsules



**1.5W** VT-201  
**EAN Code** 3800157632607 3000K  
 3800157632614 4000K  
 3800157632621 6400K

**100** Lumens | **10w** EQ.Watts | **G4** Base | **>80** CRI | **>0.4** PF



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
DC:12V	SMD	300°	Plastic	Ø12x38.5mm	30,000 Hours	200


DESCRIPTION	ORDER NO.
1.5W G4 PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 3000K	LIVTS240
1.5W G4 PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 4000K	LIVTS241
1.5W G4 PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 6400K	LIVTS242

## G9-Capsules



**2.5W** VT-203  
**EAN Code** 3800157632638 3000K  
 3800157632645 4000K  
 3800157632652 6400K

**200** Lumens | **20w** EQ.Watts | **G9** Base | **>80** CRI | **>0.4** PF



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	300°	Plastic	Ø16.5x46.5mm	30,000 Hours	200



DESCRIPTION	ORDER NO.
2.5W G9 PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 3000K	LIVTS243
2.5W G9 PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 4000K	LIVTS244
2.5W G9 PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 6400K	LIVTS245

## G9-Capsules



**3W** VT-204  
**EAN Code** 3800157632669 3000K  
 3800157632676 4000K  
 3800157632683 6400K

**300** Lumens | **25w** EQ.Watts | **G9** Base | **>80** CRI | **>0.4** PF





Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	300°	Plastic	Ø17x49mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
3W G9 PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 3000K	LIVTS246
3W G9 PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 4000K	LIVTS247
3W G9 PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 6400K	LIVTS248



### Reflectors GU5.3

**6.5W** VT-257  
**EAN Code** 3800157631693 3000K  
 3800157631709 4000K



**450** Lumens | 
 **55w** EQ.Watts | 
 **GU5.3** Base | 
 **>80** CRI | 
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
DC:12V	SMD	110°	Plastic	Ø50x55mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
6.5W MR16 RIPPLE PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 3000K 110° D	LIVTS204
6.5W MR16 RIPPLE PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 4000K 110° D	LIVTS205



### Reflectors GU5.3

**6.5W** VT-267  
**EAN Code** 3800157631723 3000K  
 3800157631730 4000K



**450** Lumens | 
 **40w** EQ.Watts | 
 **GU5.3** Base | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
DC:12V	SMD	38°	Plastic	Ø50x55mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
6.5W MR16 RIPPLE PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 3000K 38° D	LIVTS207
6.5W MR16 RIPPLE PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 4000K 38° D	LIVTS208



### Reflectors GU10-Lens-110°

**5W** VT-205  
**EAN Code** 3800157631662 3000K  
 3800157631679 4000K



**400** Lumens | 
 **35w** EQ.Watts | 
 **GU10** Base | 
 **>80** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	110°	Plastic	Ø50x55mm	30,000 Hours	200

DESCRIPTION	ORDER NO.
5W GU10 SMOOTH PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 3000K 110° D	LIVTS201
5W GU10 SMOOTH PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 4000K 110° D	LIVTS202



### Reflectors GU10-Lens-38°

**5W** VT-275  
**EAN Code** 3800157636223 3000K  
 3800157645065 4000K



**380** Lumens | 
 **40w** EQ.Watts | 
 **GU10** Base | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	38°	Plastic	Ø50x55mm	30,000 Hours	192

#### DESCRIPTION

#### ORDER NO.

GU10-5W-WHITE PLASTIC BULB-LED BY SAMSUNG-3000K	LIVTS108
GU10-5W-WHITE PLASTIC BULB-LED BY SAMSUNG-4000K	LIVTS797



### Reflectors GU10-Lens-38°

**6.5W** VT-227  
**EAN Code** 3800157631549 3000K  
 3800157631556 4000K



**480** Lumens | 
 **60w** EQ.Watts | 
 **GU10** Base | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	38°	Plastic	Ø50x55mm	30,000 Hours	200

#### DESCRIPTION

#### ORDER NO.

GU10-6.5W-RIPPLE PLASTIC LENS COVER-LED BY SAMSUNG-3000K	LIVTS189
6.5W GU10 RIPPLE PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 4000K 38° D	LIVTS190



### Reflectors GU10-Lens-110°

**6.5W** VT-247  
**EAN Code** 3800157631570 3000K  
 3800157631587 4000K



**480** Lumens | 
 **60w** EQ.Watts | 
 **GU10** Base | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	110°	Plastic	Ø50x55mm	30,000 Hours	200

#### DESCRIPTION

#### ORDER NO.



6.5W GU10 RIPPLE PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 3000K 110° D	LIVTS192
6.5W GU10 RIPPLE PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 4000K 110° D	LIVTS193





### Reflectors GU10-Lens-38°

**8W** VT-291  
**EAN Code** 3800157640824 3000K  
 3800157640831 4000K



**720** Lumens | **80w** EQ.Watts | **GU10** Base | **>80** CRI | **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	38°	Plastic	Ø50x55mm	30,000 Hours	200

#### DESCRIPTION

#### ORDER NO.

GU10-8W-PLASTIC BULB WITH LENS-38°-LED BY SAMSUNG-3000K

LIVTS875


GU10-8W-PLASTIC WITH 38 DEGREE LENS-LED BY SAMSUNG-4000K

LIVTS876



### Reflectors GU10-Lens-110°

**8W** VT-292  
**EAN Code** 3800157640794 3000K  
 3800157640800 4000K



**720** Lumens | **80w** EQ.Watts | **GU10** Base | **>80** CRI | **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	110°	Plastic	Ø50x55mm	30,000 Hours	200

#### DESCRIPTION

#### ORDER NO.

GU10-8W-PLASTIC WITH LENS-110 DEGREE LED BY SAMSUNG-3000K

LIVTS872


GU10-8W-PLASTIC BULB WITH LENS-110°-LED BY SAMSUNG-4000K

LIVTS873



### Reflectors GU10-Lens-110°

**10W** VT-271  
**EAN Code** 3800157644211 3000K  
 3800157644228 4000K



**1000** Lumens | **70w** EQ.Watts | **GU10** Base | **>80** CRI | **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	110°	Plastic	Ø50x55mm	30,000 Hours	200

#### DESCRIPTION

#### ORDER NO.

GU10-10 W-WHITE PLASTIC BULB-MILKY COVER-LED BY SAMSUNG-3000K

LIVTS878

GU10-10 W-WHITE PLASTIC BULB-MILKY COVER-LED BY SAMSUNG-4000K

LIVTS879

## Reflectors GU10-Lens-38°

**6.5W** VT-227D  
**EAN Code** 3800157631631 3000K  
 3800157631648 4000K



**450** Lumens | **35w** EQ.Watts | **GU10** Base | **>80** CRI | **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	38°	Plastic	Ø50x55mm	30,000 Hours	200

### DESCRIPTION


### ORDER NO.

6.5W GU10 RIPPLE PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 3000K 38° D DIMMABLE LIVTS195

6.5W GU10 RIPPLE PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 4000K 38° D DIMMABLE LIVTS196

## Reflectors GU10-Lens-110°

**6.5W** VT-247D  
**EAN Code** 3800157631631 3000K  
 3800157631648 4000K



**450** Lumens | **55w** EQ.Watts | **GU10** Base | **>80** CRI | **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	38°	Plastic	Ø50x55mm	30,000 Hours	200

### DESCRIPTION

### ORDER NO.

6.5W GU10 RIPPLE PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 3000K 110° D DIMMABLE LIVTS198


6.5W GU10 RIPPLE PLASTIC SPOTLIGHT WITH SAMSUNG CHIP 4000K 110° D DIMMABLE LIVTS199



## Reflectors GU5.3



**7W** VT-1967  
**EAN Code** 3800157602044 3000K  
 3800157602051 4500K



**550** Lumens | 
 **50w** EQ.Watts | 
 **GU5.3** Base | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC/DC:12V,50Hz	SMD	-	Plastic	Ø50x50mm	>20,000 Hours	200

### DESCRIPTION

### ORDER NO.

7W SPOTLIGHT MR16 12V PLASTIC 3000K WITH LENS

LIVT1663

7W SPOTLIGHT MR16 12V PLASTIC 4500K WITH LENS

LIVT1664

## Reflectors GU10-Lens-38°



**6W** VT-2206  
**EAN Code** 3800157651202 3000K  
 3800157640848 4000K



**400** Lumens | 
 **55w** EQ.Watts | 
 **GU10** Base | 
 **>95** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	38°	Plastic	Ø50x58mm	30,000 Hours	200

### DESCRIPTION

### ORDER NO.

GU10-6W-RIPPLE PLASITC LENS COVER-2700K -CRI 95 +

LIVT7497

GU10-6W-RIPPLE PLASITC LENS COVER-4000K -CRI 95 +


LIVT7498



## G13-T8-Nano Plastic Tube-Rotatable-60cm

**10W**

VT-6072SMD

**EAN Code** 3800157605212 3000K  
 3800157605229 4000K  
 3800157605236 6400K


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	160°	Nano Plastic	Ø27.9x600mm	20,000 Hours	25

### DESCRIPTION

### ORDER NO.

T8 G13 10W NANO PLASTIC TUBE ROTABLE-3000K

LIVT6229

T8 G13 10W NANO PLASTIC TUBE ROTABLE-4000K

LIVT6230




T8 G13 10W NANO PLASTIC TUBE ROTABLE 6400K

LIVT6231

## G13-T8 -Nano Plastic Tube-120cm

**18W**

VT-1277SMD

**EAN Code** 3800157612135 3000K  
 3800157615426 4000K


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	160°	Nano Plastic	Ø27.9x1200mm	20,000 Hours	25

### DESCRIPTION

### ORDER NO.

T8 18W 120CM G13 NANO PLASTIC NON ROTABLE 3000K

LIVT6263



T8 18W 120CM G13 NANO PLASTIC NON ROTABLE 4000K

LIVT6273

## G13-T8 -Nano Plastic Tube-150cm

**22W**

VT-1577SMD

**EAN Code** 3800157612159 3000K  
 3800157617437 4000K  
 3800157617444 6400K


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	160°	Nano Plastic	Ø27.9x1500mm	30,000 Hours	25

### DESCRIPTION

### ORDER NO.

T8 22W 150CM G13 NANO PLASTIC NONROTABLE 3000K

LIVT6265

T8 22W 150CM G13 NANO PLASTIC NON ROTABLE 4000K

LIVT6309

T8 22W 150CM G13 NANO PLASTIC NON ROTABLE 6400K

LIVT6310





## G13-T8 -Nano Plastic Tube-60cm

**10W**

VT-061

**EAN Code** 3800157632010 3000K  
3800157632027 4000K  
3800157632034 6400K



**1120** Lumens | **18w** EQ.Watts | **>80** CRI | **0.9** PF | **<0.5s** Instant Start | **>15000** On/Off | **0.1264kg** Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	160°	Nano Plastic	Ø27.9x600mm	30,000 Hours	25

### DESCRIPTION

### ORDER NO.



10W T8 NANO PLASTIC TUBE-ROTATABLE(60CM) WITH SAMSUNG CHIP 3000K	LIVTS650
10W T8 NANO PLASTIC TUBE-ROTATABLE(60CM) WITH SAMSUNG CHIP 4000K	LIVTS651
10W T8 NANO PLASTIC TUBE-ROTATABLE(60CM) WITH SAMSUNG CHIP 6400K	LIVTS652

## G13-T8 -Nano Plastic Tube-120cm

**18W**

VT-121

**EAN Code** 3800157632041 3000K  
3800157632058 4000K  
3800157632065 6400K



**1700** Lumens | **36w** EQ.Watts | **>80** CRI | **>0.5** PF | **<0.5s** Instant Start | **15000** On/Off | **0.1904kg** Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	160°	Nano Plastic	Ø27.9x1200mm	30,000 Hours	25

### DESCRIPTION

### ORDER NO.



18W T8 NANO PLASTIC TUBE-NON ROTATABLE(120CM) WITH SAMSUNG CHIP 3000K	LIVTS653
18W T8 NANO PLASTIC TUBE-NON ROTATABLE(120CM) WITH SAMSUNG CHIP 4000K	LIVTS654
18W T8 NANO PLASTIC TUBE-NON ROTATABLE(120CM) WITH SAMSUNG CHIP 4000K	LIVTS655

## G13-T8 -Nano Plastic Tube-150cm

**22W**

VT-151

**EAN Code** 3800157632072 3000K  
3800157632089 4000K  
3800157632096 6400K



**2000** Lumens | **58w** EQ.Watts | **>80** CRI | **>0.5** PF | **<0.5s** Instant Start | **15000** On/Off | **0.2572kg** Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	160°	Nano Plastic	Ø27.9x1500mm	30,000 Hours	25

### DESCRIPTION


### ORDER NO.

22W T8 NANO PLASTIC TUBE-NON ROTATABLE(150CM) WITH SAMSUNG CHIP 3000K	LIVTS656
22W T8 NANO PLASTIC TUBE-NON ROTATABLE(150CM) WITH SAMSUNG CHIP 4000K	LIVTS657
22W T8 NANO PLASTIC TUBE-NON ROTATABLE(150CM) WITH SAMSUNG CHIP 6400K	LIVTS658



## G13-T8 -Nano Plastic Tube-60cm

**10W** VT-062  
**EAN Code** 3800157647304 3000K  
 3800157633895 4000K  
 3800157633901 6400K



**1100** Lumens | **18w** EQ.Watts | **>80** CRI | **>0.5** PF | **<0.5s** Instant Start | **15000** On/Off | **0.1264kg** Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	160°	Nano Plastic	Ø27.9x600mm	30,000 Hours	25



### DESCRIPTION

### ORDER NO.

10W T8 NANO PLASTIC TUBE-ROTATABLE(60CM) WITH SAMSUNG CHIP 3000K HIGH LUMENS	LIVTS798
10W T8 NANO PLASTIC TUBE-ROTATABLE(60CM) WITH SAMSUNG CHIP 4000K HIGH LUMENS	LIVTS686
10W T8 NANO PLASTIC TUBE-ROTATABLE(60CM) WITH SAMSUNG CHIP 6400K HIGH LUMENS	LIVTS687

## G13-T8 -Nano Plastic Tube-120cm

**18W** VT-122  
**EAN Code** 3800157633918 3000K  
 3800157632911 4000K  
 3800157632928 6400K



**2250** Lumens | **45w** EQ.Watts | **>80** CRI | **>0.5** PF | **<0.5s** Instant Start | **15000** On/Off | **0.1904kg** Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	160°	Nano Plastic	Ø27.9x1200mm	30,000 Hours	25


### DESCRIPTION

### ORDER NO.

18W T8 NANO PLASTIC TUBE-NON ROTATABLE(120CM) WITH SAMSUNG CHIP 3000K HIGH LUMENS	LIVTS688
18W T8 NANO PLASTIC TUBE-NON ROTATABLE(120CM) WITH SAMSUNG CHIP 4000K HIGH LUMENS	LIVTS672
18W T8 NANO PLASTIC TUBE-NON ROTATABLE(120CM) WITH SAMSUNG CHIP 6400K HIGH LUMENS	LIVTS673

## G13-T8 -Nano Plastic Tube-150cm

**22W** VT-152  
**EAN Code** 3800157647311 3000K  
 3800157632935 4000K  
 3800157632942 6400K



**3000** Lumens | **75w** EQ.Watts | **>80** CRI | **>0.5** PF | **<0.5s** Instant Start | **15000** On/Off | **0.2572kg** Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	160°	Nano Plastic	Ø27.9x1500mm	30,000 Hours	25

### DESCRIPTION


### ORDER NO.

T8-150CM-G13-22W-NANO PLASTIC TUBE-HIGH LUMEN-LED BY SAMSUNG-3000K A++	LIVTS799
22W T8 NANO PLASTIC TUBE-NON ROTATABLE(150CM) WITH SAMSUNG CHIP 4000K HIGH LUMENS	LIVTS674
22W T8 NANO PLASTIC TUBE-NON ROTATABLE(150CM) WITH SAMSUNG CHIP 6400K HIGH LUMENS	LIVTS675


## G13-T8 -Nano Plastic Tube-60cm



**7W** VT-1607  
**EAN Code** 3800157647632 3000K  
 3800157647649 4000K  
 3800157647656 6400K



SuperBRIGHT  
**160**  
 LUMENS/W



**1120** Lumens | **>80** CRI | **0.9** PF | **<0.5s** Instant Start | **>15000** On/Off | **0.115kg** Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	160°	Nano Plastic	Ø27.9x600mm	30,000 Hours	25

### DESCRIPTION

### ORDER NO.

T8-G13-7W-NANO PLASTIC TUBE-60CM-3000K-155 LM /WATT +

LIVT6474

T8-G13-7W-NANO PLASTIC TUBE-60CM-4000K-160 LM / WATT +

LIVT6475


T8-G13-7W-NANO PLASTIC TUBE-60CM-6400K-160 LM / WATT +

LIVT6476


## G13-T8 -Nano Plastic Tube-120cm



**12W** VT-1612  
**EAN Code** 3800157647663 3000K  
 3800157647670 4000K  
 3800157647687 6400K



SuperBRIGHT  
**160**  
 LUMENS/W



**1920** Lumens | **>80** CRI | **0.9** PF | **<0.5s** Instant Start | **>15000** On/Off | **0.193kg** Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	160°	Nano Plastic	Ø27.9x1200mm	30,000 Hours	25

### DESCRIPTION

### ORDER NO.

T8-G13-12W-NANO PLASTIC TUBE-120CM-3000K-160 LM/WATT +

LIVT6477

T8-G13-12W-NANO PLASTIC TUBE-120CM-4000K-160 LM/WATT +

LIVT6478


T8 120CM G13 12W 160LM/W NANO PLASTIC TUBE 6400K

LIVT6479


## G13-T8 -Nano Plastic Tube-150cm



**15W** VT-1616  
**EAN Code** 3800157647694 3000K  
 VT-1615  
**EAN Code** 3800157647700 4000K  
 3800157647717 6400K



SuperBRIGHT  
**160**  
 LUMENS/W



**2400** Lumens | **>80** CRI | **0.9** PF | **<0.5s** Instant Start | **>15000** On/Off | **0.261kg** Weight

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	160°	Nano Plastic	Ø27.9x1500mm	30,000 Hours	25

### DESCRIPTION

### ORDER NO.

T8-G13-15W-150CM-NANO PLASTIC TUBE-3000K -160 LM /WATT ++

LIVT6480

T8-G13-15W-150CM-NANO PLASTIC TUBE-4000K -160 LM /WATT ++

LIVT6481

T8-G13-15W-150CM-NANO PLASTIC TUBE-6400K -160 LM /WATT ++


LIVT6482



### Decorative Bulbs - E27 - 3D Filament-A60

**3W** VT-2203  
EAN Code 3800157641524 3000K

SpecialBulbs



20 Lumens | 25w EQ.Watts | E27 Base | A60 Type | >80 CRI | >0.45 PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	COB	300°	Glass	Ø64x145mm	20,000 Hours	100

#### DESCRIPTION

LED BULB 3W E27 FILAMENT 3D A60 3000K

#### ORDER NO.


LIVT2704



### Decorative Bulbs -E27- Filament-G100

**5W** VT-2235  
EAN Code 3800157645447 2200K

SpecialBulbs



250 Lumens | 25w EQ.Watts | E27 Base | G100 Type | >80 CRI | >0.5 PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:170-240V,50Hz	SMD	300°	Glass	Ø100x190mm	20,000 Hours	20

#### DESCRIPTION

G100-E27-5W-VINTAGE SMD LED BULB-2200K

#### ORDER NO.


LIVT2748



### Decorative Bulbs E27 - Amber Cover - Filament - T60 - E27

**5W** VT-2245  
EAN Code 3800157645454 2200K

SpecialBulbs



250 Lumens | 25w EQ.Watts | E27 Base | T60 Type | >80 CRI | >0.5 PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:170-240V,50Hz	SMD	300°	Glass	Ø60x183mm	>20,000 Hours	35

#### DESCRIPTION

T60-E27-5W-VINTAGE SMD LED BULB-2200K


#### ORDER NO.

LIVT2749

## Decorative Bulbs - E27 - Filament-T180

**8W** VT-2308  
**EAN Code** 3800157648592 2200K

SpecialBulbs



**620** Lumens |
 **55w** EQ.Watts |
 **E27** Base |
 **T180** Type |
 **>80** CRI |
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	180x190mm	20,000 Hours	6

### DESCRIPTION



### ORDER NO.

T180-E27-8W-LED FLAMENT BULB AMBER GLASS-2200K

LIVT2790

## Decorative Bulbs E27- Amber Cover - LED Filament Bulbs

**4W** VT-2154  
**EAN Code** 3800157625197 2200K



**250** Lumens |
 **40w** EQ.Watts |
 **E27** Base |
 **A60** Type |
 **>80** CRI |
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	Ø60x98mm	20,000 Hours	50

### DESCRIPTION



### ORDER NO.

LED BULB 4W FILAMENT E27 TWIST CANDLE AMBER WARM WHITE

LIVT7335

## Decorative Bulbs E27 - Amber Cover - Filament - A67

**8W** VT-1958  
**EAN Code** 3800157609067 2200K



**720** Lumens |
 **60w** EQ.Watts |
 **E27** Base |
 **A67** Type |
 **>80** CRI |
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	Ø67x123mm	>20,000 Hours	50

### DESCRIPTION

### ORDER NO.


BULB 8W E27 A67 FILAMENT AMBER COVER 2300K

LIVT4472



## Decorative Bulbs E27 - Amber Cover - Filament - A67

**10W** VT-2028  
EAN Code 3800157612227 2200K



**900** Lumens | 
 **65w** EQ.Watts | 
 **E27** Base | 
 **A67** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	Ø67x123mm	>20,000 Hours	50

### DESCRIPTION

### ORDER NO.


BULB 10W E27 A67 FILAMENT AMBER COVER 2200K

LIVT7157



## Decorative Bulbs E27- Amber Filament - A70

**12.5W** VT-2123  
EAN Code 3800157637862 2200K



**1240** Lumens | 
 **85w** EQ.Watts | 
 **E27** Base | 
 **A70** Type | 
 **>80** CRI | 
 **>0.5** PF


Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	330°	Glass	Ø70x132mm	20,000 Hours	50

### DESCRIPTION

### ORDER NO.


12.5W A70 LED FILAMENT BULB-AMBER COVER WITH COLOROCDE:2200K E27

LIVT7457

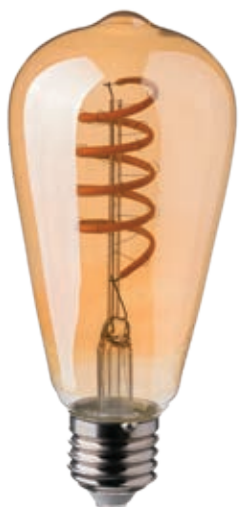

## Decorative Bulbs E27 - Amber Cover - Filament-T60-E27

**4W** VT-2144  
EAN Code 3800157624718 2200K



**320** Lumens | 
 **35w** EQ.Watts | 
 **E27** Base | 
 **T60** Type | 
 **>80** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50/60Hz	Filament	300°	Glass	Ø60x107mm	20,000 Hours	35


### DESCRIPTION

### ORDER NO.

LED BULB 4W SPIRAL FILAMENT E27 ST64 AMBER GLASS WARM WHITE



LIVT7327



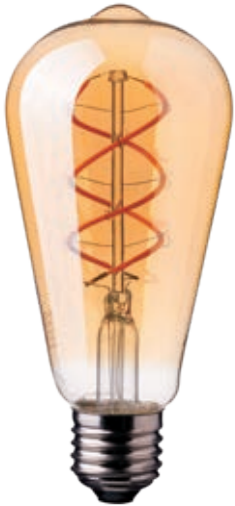

### Decorative Bulbs E27 - Amber Cover -Filament-ST64

**5W** VT-2065  
 EAN Code 3800157617260 2200K



**300** Lumens | 
 **30w** EQ.Watts | 
 **E27** Base | 
 **ST64** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	64x140mm	>20,000 Hours	100

#### DESCRIPTION


#### ORDER NO.

LED BULB 5W FILAMENT E27 GOLD GLASS CURVE SHAPE ST64 WARM WHITE LIVT7218



### Decorative Bulbs E27-Amber Cover -Filament - ST64

**5W** VT-2066  
 EAN Code 3800157617284 2200K



**300** Lumens | 
 **30w** EQ.Watts | 
 **E27** Base | 
 **ST64** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	300°	Glass	64x140mm	20,000 Hours	100

#### DESCRIPTION


#### ORDER NO.

BULB 5W E27 ST64 LONG FILAMENT GOLD GLASS 2200K LIVT7220



### Decorative Bulbs E27 - Amber Cover -Filament-Globe

**4W** VT-2024  
 EAN Code 3800157610612 2200K



**350** Lumens | 
 **35w** EQ.Watts | 
 **E27** Base | 
 **G95** Type | 
 **>80** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50Hz	Filament	300°	Glass	95x140mm	20,000 Hours	50

#### DESCRIPTION


#### ORDER NO.

LED BULB 4W E27 G95 FILAMENT AMBER 2200K LIVT7146



### Decorative Bulbs E27 - Amber Cover -Filament-Globe

**5W** VT-2075  
 EAN Code 3800157617253 2200K



**300** Lumens | 
 **30w** EQ.Watts | 
 **E27** Base | 
 **G95** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50/60Hz	Filament	300°	Glass	95x138mm	>20,000 Hours	50

**DESCRIPTION**
**ORDER NO.**

BULB 5W E27 G95 FILAMENT GOLD GLASS CURVE SHAPE 2200K

LIVT7217



### Decorative Bulbs E27- Amber Cover -Filament-Globe

**8W** VT-2019  
 EAN Code 3800157610605 2200K



**700** Lumens | 
 **65w** EQ.Watts | 
 **E27** Base | 
 **G95** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50/60Hz	Filament	300°	Glass	95x140mm	20,000 Hours	50

**DESCRIPTION**
**ORDER NO.**


LED BULB 8W E27 G95 FILAMENT AMBER 2200K

LIVT7145



### Decorative Bulbs E27 - Filament-Globe

**4W** VT-2195  
 EAN Code 3800157640329 1800K



**200** Lumens | 
 **20w** EQ.Watts | 
 **E27** Base | 
 **G125** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50Hz	Filament	300°	Glass	132x178mm	20,000 Hours	20

**DESCRIPTION**
**ORDER NO.**


G125-E27-4W-ART FILAMENT CANDLE BULB-AMBER GLASS-1800K±200K

LIVT7475



### Decorative Bulbs E27 - Filament-G125

**12.5W** VT-2153  
 EAN Code 3800157637855 2200K



**1240** Lumens | 
 **85w** EQ.Watts | 
 **E27** Base | 
 **G125** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	Filament	330°	Glass	125x178mm	>20,000 Hours	25

#### DESCRIPTION


#### ORDER NO.

12.5W G125 LED FILAMENT BULB-AMBER COVER WITH COLOROCDE:2200K E27 LIVT7456



### Decorative Bulbs E27 - Amber Cover -Filaments-T30

**5W** VT-2005  
 EAN Code 3800157610575 2200K



**500** Lumens | 
 **45w** EQ.Watts | 
 **E27** Base | 
 **T30** Type | 
 **>80** CRI | 
 **>0.5** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50/60Hz	Filament	300°	Glass	30x300mm	20,000 Hours	100

#### DESCRIPTION


#### ORDER NO.

LED BULB 5W T30 E27 FILAMENT AMBER 2200K LIVT7142



### Decorative Bulbs E27 - Color Bulbs-G45

**2W** VT-2132  
 EAN Code 3800157630276 Green



**60** Lumens | 
 **10w** EQ.Watts | 
 **E27** Base | 
 **G45** Type | 
 **>80** CRI | 
 **>0.4** PF

Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC: 220-240V,50Hz	Filament	300°	Glass	45x75mm	20,000 Hours	100

#### DESCRIPTION

#### ORDER NO.

2W G45 LED GREEN COLOR FILAMENT BULB E27 LIVT7411



## Classic E27 LED Emergency Bulb - With Battery

**9W** VT-2309  
**EAN Code** 3800157649513 3000K  
 3800157649520 4000K  
 3800157649537 6400K



**806**  
Lumens



**60w**  
EQ Watts



**E27**  
Base




**A70**  
Type



**>80**  
CRI



**>0.5**  
PF



Voltage/Frequency	LED Type	Beam Angle	Body Type	Dimension	Life span	Box Qty.
AC:220-240V,50Hz	SMD	200°	Thermoplastic	70x142mm	30,000 Hours	50

DESCRIPTION	ORDER NO.
9W A65 LED PLASTIC BULB WITH EMERGENCY BATTERY(2HOURS) 3000K E27	LIVT2371
9W A65 LED PLASTIC BULB WITH EMERGENCY BATTERY(2HOURS) 4000K E27	LIVT2372
9W A65 LED PLASTIC BULB WITH EMERGENCY BATTERY(2HOURS) 6400K E27	LIVT2373



### Emergency Specs

- 280lm Lumens
- Power:3W
- 3 Hour Working Time
- 6 Hour Charging Time
- Lithium Battery DC:3.7V, 1800mAh

**Multi-Functional LED Bulb – Our Emergency Light Bulb is portable, and can be used as camping light, flashlight, hook light, warehouse light and use as normal bulb aswell.**

## Waterproof Box Terminal Block

VT-881

EAN Code 3800157642835



150  
Box Qty.



IP65  
RATING



Voltage/Frequency	Material	Size	Wire range	Cable Diameter	Fire Retardant Level	Ampere
AC:450V	PP	Ø65.33x46.31mm	0.5-2.5mm²	5-9mm	V2	24A

### DESCRIPTION

### ORDER NO.

BLACK 3 PIN TERMINAL BLOCK( 5-9MM )-IP66

LIVT5987

## Waterproof Box Terminal Block

VT-868

EAN Code 3800157642828  
3800157636070



150  
Box Qty.



IP68  
RATING



Voltage/Frequency	Material	Size	Wire range	Cable Diameter	Fire Retardant Level	Ampere
AC:450V	Polycarbonate(PA66)	75.8x26.7mm	0.5-1.5mm²	5-9mm	V2	16A

### DESCRIPTION

### ORDER NO.

WHITE WATER PROOF TERMINAL BLOCK-CABLE DIAMETER( 5-9MM )-IP68

LIVT5986

BLACK WATER PROOF TERMINAL BLOCK-(5-9MM)-IP68

LIVT5977

## Waterproof Box Terminal Block

VT-869


EAN Code 3800157636087  
3800157636094



1000  
Box Qty.



IP68  
RATING



Voltage/Frequency	Material	Size	Wire range	Cable Diameter	Fire Retardant Level	Ampere
AC:450V	Polycarbonate(PC)	106.8x96x29mm	0.5-4mm²	8-12mm	V2	24A

### DESCRIPTION

### ORDER NO.

BLACK WATER PROOF TERMINAL BLOCK-(8-12MM)-IP68

LIVT5978

WHITE WATER PROOF TERMINAL BLOCK-(8-12MM)-IP68

LIVT5979

## Waterproof Box Terminal Block

VT-870

EAN Code 3800157636100  
3800157636117



100  
Box Qty.



IP68  
RATING



Voltage/Frequency	Material	Size	Wire range	Cable Diameter	Fire Retardant Level	Ampere
AC:450V	Polycarbonate(PC)	126.8x93.3x35.3mm	0.5-4mm²	8-12mm	V2	24A

### DESCRIPTION

### ORDER NO.

BLACK WATER PROOF TERMINAL BLOCK-(8-12MM)-IP68

LIVT5980

WHITE WATER PROOF TERMINAL BLOCK-(8-12MM)-IP68

LIVT5981





## Waterproof Box Terminal Block

VT-871

EAN Code 3800157636124  
3800157636131



100  
Box Qty.



IP68  
RATING



Voltage/Frequency	Material	Size	Wire range	Cable Diameter	Fire Retardant Level	Ampere
AC:450V	Polycarbonate(PC)	112.6x93.3x35.3mm	0.5~4mm <sup>2</sup>	8-12mm	V2	24A

DESCRIPTION	ORDER NO.
BLACK 4 PIN WATER PROOF TERMINAL BLOCK-CABLE DIAMETER(8-12MM)-IP68	LIVT5982
WHITE 4 PIN WATER PROOF TERMINAL BLOCK-CABLE DIAMETER(8-12MM)-IP68	LIVT5983



VT-7224

EAN Code 3800157605335



160  
Box Qty.



IP65  
RATING



Voltage/Frequency	Material	Size	Wire range
AC:250V Max	Polypropylene (PP)	123x46x33mm	0.5-2.5mm <sup>2</sup>

DESCRIPTION	ORDER NO.
WATERPROOF BOX WITH TERMINAL BLOCK	LIVT3578



VT-792

EAN Code 3800157607735  
3800157619196



500  
Box Qty.



IP68  
RATING



Voltage/Frequency	Material	Size	Wire range
AC:220V	Flame Retardant PP	Ø27x76mm	4-6.5mm

DESCRIPTION	ORDER NO.
WATERPROOF BOX WITH TERMINAL BLOCK	LIVT3621
WATERPROOF WITE CONNECTOR-WHITE	LIVT5896



VT-7224

EAN Code 3800157619202



240  
Box Qty.



IP68  
RATING



Voltage/Frequency	Material	Size	Wire range
AC:250V Max	Polypropylene (PP)	123x46x33mm	0.5-2.5mm <sup>2</sup>

DESCRIPTION	ORDER NO.
WATERPROOF BOX WITH TERMINAL BLOCK WHITE	LIVT5897

## INTRODUCING THE NEW SERIES

evolution

**5 YEAR  
WARRANTY**

Our bestselling LED Lights — now upgraded  
with a superior efficiency of **160 lm/W** through  
the latest in LED technology.

*Super***BRIGHT****160****LUMENS/W****5 YEAR  
WARRANTY**

## Index of order numbers

ORDER NO.	PAGE NO.	ORDER NO.	PAGE NO.	ORDER NO.	PAGE NO.	ORDER NO.	PAGE NO.	ORDER NO.	PAGE NO.
LIVT1663	85	LIVT3243	59	LIVT4394	75	LIVT5986	97	LIVT7408	65
LIVT1664	85	LIVT3244	60	LIVT4399	79	LIVT5987	97	LIVT7411	95
LIVT2016	53	LIVT3246	59	LIVT4407	73	LIVT6185	33	LIVT7423	76
LIVT2025	53	LIVT3247	59	LIVT4408	73	LIVT6198	33	LIVT7453	79
LIVT2042	53	LIVT3249	61	LIVT4410	73	LIVT6200	33	LIVT7454	79
LIVT2120	53	LIVT3250	61	LIVT4427	75	LIVT6201	33	LIVT7456	95
LIVT2122	53	LIVT3251	61	LIVT4429	76	LIVT6229	86	LIVT7457	92
LIVT2124	54	LIVT3252	61	LIVT4453	66	LIVT6230	86	LIVT7458	74
LIVT2143	53	LIVT3256	60	LIVT4454	66	LIVT6231	86	LIVT7459	74
LIVT2149	54	LIVT3257	60	LIVT4472	91	LIVT6263	86	LIVT7475	94
LIVT2150	54	LIVT3258	60	LIVT4477	77	LIVT6265	86	LIVT7482	67
LIVT2155	54	LIVT3300	58	LIVT4488	78	LIVT6273	86	LIVT7483	67
LIVT2159	54	LIVT3309	58	LIVT4854	17	LIVT6284	34	LIVT7485	67
LIVT2164	56	LIVT3337	58	LIVT4855	17	LIVT6285	34	LIVT7486	67
LIVT2165	56	LIVT3339	58	LIVT4857	17	LIVT6286	34	LIVT7488	68
LIVT2166	56	LIVT3423	14	LIVT4858	17	LIVT6287	34	LIVT7489	68
LIVT2371	96	LIVT3469	11	LIVT4860	18	LIVT6309	86	LIVT7491	65
LIVT2372	96	LIVT3470	11	LIVT4861	18	LIVT6310	86	LIVT7492	65
LIVT2373	96	LIVT3471	11	LIVT4863	17	LIVT6428	19	LIVT7494	68
LIVT2461	55	LIVT3578	98	LIVT4864	17	LIVT6430	20	LIVT7495	68
LIVT2462	55	LIVT3581	11	LIVT4865	17	LIVT6474	89	LIVT7497	85
LIVT2463	55	LIVT3582	11	LIVT4866	18	LIVT6475	89	LIVT7498	85
LIVT2580	56	LIVT3584	11	LIVT4867	18	LIVT6476	89	LIVT8275	20
LIVT2581	56	LIVT3585	12	LIVT4869	18	LIVT6477	89	LIVT8600	3
LIVT2582	56	LIVT3586	12	LIVT4870	18	LIVT6478	89	LIVT8601	3
LIVT2593	55	LIVT3599	12	LIVT4872	19	LIVT6479	89	LIVT40311	3
LIVT2594	55	LIVT3600	12	LIVT4873	19	LIVT6480	89	LIVT40321	3
LIVT2595	55	LIVT3601	12	LIVT4887	19	LIVT6481	89	LIVTS108	82
LIVT2596	55	LIVT3605	12	LIVT4888	19	LIVT6482	89	LIVTS111	69
LIVT2597	55	LIVT3606	13	LIVT4904	26	LIVT7113	76	LIVTS112	69
LIVT2598	55	LIVT3608	13	LIVT4905	26	LIVT7119	73	LIVTS117	70
LIVT2704	90	LIVT3615	13	LIVT4907	26	LIVT7142	95	LIVTS118	70
LIVT2707	66	LIVT3616	13	LIVT4908	26	LIVT7145	94	LIVTS135	71
LIVT2708	66	LIVT3621	98	LIVT4910	26	LIVT7146	93	LIVTS136	71
LIVT2710	67	LIVT3622	49	LIVT4911	26	LIVT7157	92	LIVTS138	71
LIVT2748	90	LIVT3623	49	LIVT4913	27	LIVT7177	77	LIVTS139	71
LIVT2749	90	LIVT3625	58	LIVT4914	27	LIVT7189	78	LIVTS141	71
LIVT2790	91	LIVT3641	13	LIVT4916	27	LIVT7191	78	LIVTS142	71
LIVT2802	74	LIVT3647	13	LIVT4917	27	LIVT7217	94	LIVTS150	72
LIVT2803	79	LIVT3652	14	LIVT4919	27	LIVT7218	93	LIVTS151	72
LIVT3228	58	LIVT3691	14	LIVT4920	27	LIVT7220	93	LIVTS153	72
LIVT3231	59	LIVT4156	68	LIVT5896	98	LIVT7260	65	LIVTS154	72
LIVT3232	59	LIVT4164	68	LIVT5897	98	LIVT7261	65	LIVTS159	63
LIVT3233	59	LIVT4259	73	LIVT5977	97	LIVT7327	92	LIVTS160	63
LIVT3237	60	LIVT4300	75	LIVT5978	97	LIVT7335	91	LIVTS161	63
LIVT3238	60	LIVT4302	76	LIVT5979	97	LIVT7349	66	LIVTS162	64
LIVT3239	61	LIVT4361	74	LIVT5982	98	LIVT7350	66	LIVTS163	64
LIVT3240	61	LIVT4366	77	LIVT5983	98	LIVT7407	65	LIVTS164	64

ORDER NO.	PAGE NO.	ORDER NO.	PAGE NO.	ORDER NO.	PAGE NO.	ORDER NO.	PAGE NO.	ORDER NO.	PAGE NO.
LIVTS168	70	LIVTS380	8	LIVTS451	47	LIVTS668	31	LIVTS895	51
LIVTS169	70	LIVTS381	8	LIVTS452	47	LIVTS669	31	LIVTS896	51
LIVTS170	70	LIVTS383	5	LIVTS454	39	LIVTS672	88	LIVTS964	45
LIVTS171	69	LIVTS384	5	LIVTS455	39	LIVTS673	88	LIVTS965	45
LIVTS172	69	LIVTS385	9	LIVTS457	47	LIVTS674	88	LIVTS966	45
LIVTS174	64	LIVTS386	9	LIVTS458	47	LIVTS675	88	LIVTS967	45
LIVTS175	64	LIVTS387	9	LIVTS460	48	LIVTS678	35	LIVTS969	45
LIVTS189	82	LIVTS388	9	LIVTS461	48	LIVTS679	35	LIVTS974	24
LIVTS190	82	LIVTS389	9	LIVTS463	40	LIVTS686	88	LIVTS975	24
LIVTS192	82	LIVTS390	9	LIVTS464	40	LIVTS687	88	LIVTS980	24
LIVTS193	82	LIVTS391	9	LIVTS466	48	LIVTS688	88	LIVTS981	24
LIVTS195	84	LIVTS392	9	LIVTS467	48	LIVTS689	29	LIVTS983	25
LIVTS196	84	LIVTS393	9	LIVTS469	48	LIVTS690	29	LIVTS984	25
LIVTS198	84	LIVTS394	9	LIVTS470	48	LIVTS691	29	LIVTS989	24
LIVTS199	84	LIVTS400	39	LIVTS472	41	LIVTS692	29	LIVTS990	24
LIVTS201	81	LIVTS401	39	LIVTS473	41	LIVTS693	29	LIVTS995	25
LIVTS202	81	LIVTS403	39	LIVTS475	42	LIVTS694	29	LIVTS996	25
LIVTS204	81	LIVTS404	39	LIVTS476	42	LIVTS695	29	LIVTS998	25
LIVTS205	81	LIVTS406	40	LIVTS477	42	LIVTS696	29	LIVTS999	25
LIVTS207	81	LIVTS407	40	LIVTS478	42	LIVTS697	29	LIVTS20045	69
LIVTS208	81	LIVTS408	40	LIVTS479	42	LIVTS727	23	LIVTS20222	35
LIVTS228	63	LIVTS409	40	LIVTS481	42	LIVTS728	23	LIVTS20223	35
LIVTS229	63	LIVTS410	40	LIVTS482	42	LIVTS730	22		
LIVTS231	63	LIVTS412	41	LIVTS484	43	LIVTS731	22		
LIVTS232	63	LIVTS413	41	LIVTS486	44	LIVTS733	23		
LIVTS240	80	LIVTS414	41	LIVTS488	44	LIVTS734	23		
LIVTS241	80	LIVTS415	41	LIVTS489	44	LIVTS736	22		
LIVTS242	80	LIVTS416	41	LIVTS504	46	LIVTS737	22		
LIVTS243	80	LIVTS418	43	LIVTS606	6	LIVTS739	23		
LIVTS244	80	LIVTS419	43	LIVTS607	6	LIVTS740	23		
LIVTS245	80	LIVTS420	43	LIVTS608	6	LIVTS742	22		
LIVTS246	80	LIVTS422	44	LIVTS609	6	LIVTS743	22		
LIVTS247	80	LIVTS424	37	LIVTS650	87	LIVTS797	82		
LIVTS248	80	LIVTS425	37	LIVTS651	87	LIVTS798	88		
LIVTS272	72	LIVTS427	37	LIVTS652	87	LIVTS799	88		
LIVTS320	57	LIVTS428	37	LIVTS653	87	LIVTS863	70		
LIVTS321	57	LIVTS430	37	LIVTS654	87	LIVTS864	70		
LIVTS322	57	LIVTS431	37	LIVTS655	87	LIVTS866	64		
LIVTS323	57	LIVTS433	46	LIVTS656	87	LIVTS867	64		
LIVTS324	57	LIVTS434	46	LIVTS657	87	LIVTS872	83		
LIVTS325	57	LIVTS436	46	LIVTS658	87	LIVTS873	83		
LIVTS331	57	LIVTS437	46	LIVTS659	31	LIVTS875	83		
LIVTS332	57	LIVTS439	38	LIVTS660	31	LIVTS876	83		
LIVTS333	57	LIVTS440	38	LIVTS661	31	LIVTS878	83		
LIVTS374	5	LIVTS442	38	LIVTS662	31	LIVTS879	83		
LIVTS375	5	LIVTS443	38	LIVTS663	31	LIVTS882	5		
LIVTS376	5	LIVTS445	38	LIVTS664	31	LIVTS891	51		
LIVTS377	8	LIVTS446	38	LIVTS665	31	LIVTS892	51		
LIVTS378	8	LIVTS448	47	LIVTS666	31	LIVTS893	51		
LIVTS379	8	LIVTS449	47	LIVTS667	31	LIVTS894	51		

# GENERAL TERMS OF DELIVERY

## General Terms of Delivery

issued by the Austrian Electrical and Electronics Industry Association (FEEL)



### 1. Scope

- 1.1. These General Terms shall govern legal transactions between business enterprises, namely the delivery of commodities and, mutatis mutandis, the rendering of services. Software transactions are with precedence governed by the Software Conditions issued by the Austrian Electrical and Electronics Industry Association, assembly work by the Terms and Conditions for Assembly Work issued by the Austrian Power Current and Light Current Engineering Industry and/or (where applicable) the Terms and Conditions for the Assembly of Electrical Equipment used in Medicine issued by the Austrian Electrical and Electronics Industry (the current versions are available at [www.feel.at](http://www.feel.at)).
- 1.2. Any departure from the terms and conditions mentioned in 1.1 above shall be valid only if expressly accepted in writing by Seller.

### 2. Submission of offers

- 2.1. Seller's offers shall be deemed offers without engagement.
- 2.2. Tender documents and project documentation must not be duplicated nor made available to third parties without the permission of Seller. They may be claimed back at any time and shall be returned to Seller immediately if the order is placed elsewhere.

### 3. Conclusion of contract

- 3.1. The contract shall be deemed concluded upon written confirmation by Seller of an order received or upon dispatch of a delivery.
- 3.2. Particulars appearing in catalogues, folders etc. as well as any oral or written statements shall only be binding if Seller makes express reference to them in the confirmation of the order.
- 3.3. Subsequent amendments of or additions to the contract shall be subject to written confirmation.

### 4. Prices

- 4.1. Prices shall be quoted ex works or ex Seller's warehouse without VAT, packing and packaging, loading, disassembly, take-back and proper recycling and disposal of waste electrical and electronic equipment for commercial purposes as defined by the Ordinance Regulating the Handling of Waste Electrical Equipment. Buyer shall be liable for any and all charges, taxes or other duties levied in respect of delivery. If the terms of delivery include transport to a destination designated by Buyer, transport costs as well as the cost of any transport insurance desired by Buyer shall be borne by the latter. Delivery does not, however, include unloading and subsequent handling. Packaging materials will be taken back only by express agreement.
- 4.2. Seller reserves the right to modify prices if the order placed is not in accordance with the offer submitted.
- 4.3. Prices are based on costs obtaining at the time of the first quotation. In the event that the costs have increased by the time of delivery, Seller shall have the right to adjust prices accordingly.
- 4.4. In carrying out repair orders, Seller shall provide all services deemed expedient and shall charge Buyer for the same on the basis of the work input and/or expenditures required. The same holds for any services or additional services the expediency of which becomes apparent only as the repair order is executed. In such an event special notification of Buyer shall not be required.
- 4.5. Expenses for estimates of costs of repair and maintenance or for expert valuations shall be invoiced to Buyer.

### 5. Delivery

- 5.1. The period allowed for delivery shall commence at the latest of the following dates:
  - a) the date of order confirmation by Seller;
  - b) the date of fulfilment by Buyer of all the conditions, technical, commercial and other, for which he is responsible;
  - c) the date of receipt by Seller of a deposit or security due before delivery of the goods in question.
- 5.2. Buyer shall obtain whatever licences or approvals may be required from authorities or third parties for the construction of plant and equipment. If the granting of such licences or approvals is delayed for any reason the delivery period shall be extended accordingly.
- 5.3. Seller may carry out, and charge Buyer for, partial or advance deliveries. If delivery on call is agreed upon, the commodity shall be deemed called off at the latest one year after the order was placed.
- 5.4. In case of unforeseeable circumstances or circumstances beyond the parties control, such as all cases of force majeure, which impede compliance with the agreed period of delivery, the latter shall be extended in any case for the duration of such circumstances; these include in particular armed conflicts, official interventions and prohibitions, delays in transport or customs clearance, damages in transit, energy shortage and raw materials scarcity, labour disputes, and default on performance by a major component supplier who is difficult to replace. The aforesaid circumstances shall be deemed to prevail irrespective of whether they affect Seller or his subcontractor(s).
- 5.5. If a contractual penalty for default of delivery was agreed upon by contracting parties when the contract was concluded, it shall be executed as follows, and any deviations concerning individual items shall not affect the remaining provisions: Where delay in performance can be shown to have occurred solely through the fault of Seller, Buyer may claim for each completed week of delay an indemnity

of at most one half of one per cent, a total of no more than 5 %, however, of the value of that part of the goods to be delivered which cannot be used on account of Seller's failure to deliver an essential part thereof, provided the Buyer has suffered a damage to the aforesaid extent. Assertion of rights of damages exceeding this extent is precluded.

### 6. Passage of risk and place of performance

- 6.1. Unless otherwise agreed, the delivery of goods is considered sold EXW in accordance with INCOTERMS® 2010.
- 6.2. For services, the place of performance shall be the place indicated in the written order confirmation, secondary to that at which the service is actually rendered by Seller. The risk in respect of such services or any part thereof shall pass to Buyer at the time the services have been rendered.

### 7. Payment

- 7.1. Unless otherwise agreed, one third of the purchase price shall fall due at the time of receipt by Buyer of the order confirmation of Seller, one third after half the delivery period has elapsed and the balance at the time of delivery. Irrespective thereof the turnover tax comprised in the amount of the invoice shall be paid within 30 days of the invoice date. If bankruptcy proceedings are instituted against the assets of Buyer or if an application for bankruptcy proceedings is not granted for insufficiency of assets, deliveries shall only be made against cash in advance.
- 7.2. In the case of part settlements the individual part payments shall fall due upon receipt of the respective invoices. The same shall apply to amounts invoiced for additional deliveries or resulting from additional agreements beyond the scope of the original contract, irrespective of the terms of payment agreed upon for the principal delivery.
- 7.3. Payment shall be made without any discount free Seller's domicile in the agreed currency. Drafts and checks shall be accepted on account of payment only, with all interest, fees and charges in connection therewith (such as collection and discounting charges) to be borne by Buyer.
- 7.4. Buyer shall not be entitled to withhold or offset payment on the grounds of any warranty claims or other counterclaims.
- 7.5. Payment shall be deemed to have been effected on the date at which the amount in question is at Seller's disposal.
- 7.6. If Buyer fails to meet the terms of payment or any other obligation arising from this or other legal transactions, Seller may without prejudice to his other rights
  - a) suspend performance of his own obligations until payments have been made or other obligations fulfilled, and exercise his right to extend the period of delivery to a reasonable extent,
  - b) call in debts arisen from this or any other legal transactions and charge default interest amounting to 1.25 % per month plus turnover tax for these amounts beginning with the due dates, unless Seller proves costs exceeding this.
  - c) only perform other legal transactions against cash in advance in the case of qualified insolvency, in other words, following two delays in payment.In any case Seller has the right to invoice all expenses arising prior to a lawsuit, especially reminder charges and lawyer's fees.
- 7.7. Discounts or bonuses are subject to complete payment in due time.
- 7.8. Seller retains title to all goods delivered by him until receipt of all amounts invoiced including interests and charges. Buyer herewith assigns his claim out of a resale of conditional commodities, even if they are processed, transformed or combined with other commodities, to Seller to secure the latter's purchase money claim. In the case of resale granting respite Buyer shall have the power of disposal of the product under retention of ownership only with the proviso that upon reselling Buyer notifies the secondary buyer of the assignment for security or enters the assignment in his account books. Upon request Buyer has to notify the assigned claim and the debtor thereof to Seller, and to make all information and material required for his debt collection available and to notify the assignment to the third-party debtor. If the goods are attached or otherwise levied upon, Buyer shall draw attention to Seller's title and immediately inform Seller of the attachment or levy.

### 8. Warranty and acceptance of obligation to repair defects

- 8.1. Once the agreed terms of payment have been complied with, Seller shall, subject to the conditions hereunder, remedy any defect existing at the time of acceptance of the article in question whether due to faulty design, material or manufacture, that impairs the functioning of said article. From particulars appearing in catalogues, folders, promotional literature as well as written or oral statements which have not been included in the agreement no warranty obligations may be deduced.
- 8.2. Unless special warranty periods operate for individual items the warranty period shall be 12 months. These conditions shall also apply to any goods supplied, or services rendered in respect of goods supplied, that are firmly attached to buildings or the ground. The warranty period begins at the point of passage of risk acc. to paragraph 6.
- 8.3. For improved or exchanged parts, the warranty period shall start again, but shall end in any case 6 months after the original warranty period has expired.
- 8.4. If delivery or the performance of services is delayed for reasons outside the control of Seller, the warranty period shall begin 2 weeks after Seller is ready to deliver or perform services.



# GENERAL TERMS OF DELIVERY

- 8.5. The foregoing warranty obligations are conditional upon the Buyer giving within a reasonable period notice in writing of any defects that have occurred and such notice reaching the Seller. Buyer shall prove within a reasonable period the presence of a defect, in particular he shall make available within a reasonable period to Seller all material and data in his possession. Upon receipt of such notice Seller shall, in the case of a defect covered by the warranty under 8.1 above, have the option to replace the defective goods or defective parts thereof or else to repair them on Buyer's premises or have them returned for repair, or to grant a fair and reasonable price reduction.
- 8.6. Any expenses incurred in connection with rectifying defects (e. g. expenses for assembly and disassembly, transport, waste disposal, travel and siteto-quarters time) shall be borne by Buyer. For warranty work on Buyer's premises Buyer shall make available free of charge any assistance, hoisting gear, scaffolding and sundry supplies and incidentals that may be required. Replaced parts shall become the property of Seller.
- 8.7. If an article is manufactured by Seller on the basis of design data, design drawings, models or other specifications supplied by Buyer, Seller's warranty shall be restricted to non-compliance with Buyers specifications.
- 8.8. Seller's warranty obligation shall not extend to any defects due to assembly and installation work not undertaken by Seller, inadequate equipment, or due to non-compliance with installation requirements and operating conditions, overloading of parts in excess of the design values stipulated by Seller, negligent or faulty handling or the use of inappropriate materials, nor for defects attributable to material supplied by Buyer. Nor shall Seller be liable for damage due to acts of third parties, atmospheric discharges. Excess voltage and chemical influences. The warranty does not cover the replacement of parts subject to natural wear and tear. Seller accepts no warranty for the sale of used goods.
- 8.9. The warranty shall lapse immediately if, without written consent of Seller, Buyer himself or a third party not expressly authorised undertakes modifications or repairs on any items delivered.
- 8.10. Claims acc. to § 933b ABGB are struck by the statute of limitation with lapse of the period mentioned under point 8.2.
- 8.11. The provisions of sub-paragraphs 8.1 to 8.10 shall apply, mutatis mutandis, to all cases where the obligation to repair defects has to be accepted for other reasons laid down by law.
- 9. Withdrawal from contract**
- 9.1. Buyer may withdraw from the contract only in the event of delays caused by gross negligence on the part of Seller and only after a reasonable period of grace has elapsed. Withdrawal from contract shall be notified in writing by registered mail.
- 9.2. Irrespective of his other rights Seller shall be entitled to withdraw from the contract
- a) if the execution of delivery or the inception or continuation of services to be rendered under the contract is made impossible for reasons within the responsibility of Buyer and if the delay is extended beyond a reasonable period of grace allowed;
  - b) if doubts have arisen as to Buyer's creditworthiness and if same fails, on Seller's request, to make an advance payment or to provide adequate security prior to delivery, or
  - c) if, for reasons mentioned in 5.4, the period allowed for delivery is extended by more than half of the period originally agreed or by at least 6 months, or
  - d) if Buyer does not or does not properly meet the obligations imposed as per paragraph 13.
- 9.3. For the reasons given above withdrawal from the contract shall also be possible in respect of any outstanding part of the delivery or service contracted for.
- 9.4. If bankruptcy proceedings are instituted against Buyer or an application for bankruptcy proceedings is not granted for insufficiency of assets, Seller may withdraw from the contract without allowing a period of grace. If this withdrawal is taken, it shall take effect immediately upon the decision that the business will not be continued. If the business will be continued, a withdrawal shall not take effect until 6 months after the institution of bankruptcy proceedings or after an application for bankruptcy proceedings has not been granted for insufficiency of assets. In any case, the contract shall be terminated immediately unless the bankruptcy law to which Buyer is subject conflicts with this or if termination of the contract is necessary to prevent significant damages to Seller.
- 9.5. Without prejudice to Seller's claim for damages including expenses arising prior to a lawsuit, upon withdrawal from contract any open accounts in respect of deliveries made or services rendered in whole or in part shall be settled according to contract. This provision also covers deliveries or services not yet accepted by Buyer as well as any preparatory acts performed by Seller. Seller shall, however, have the option alternatively to require the restitution of articles already delivered.
- 9.6. Withdrawal from contract shall have no consequences other than those stipulated above.
- 9.7. The assertion of claims on the ground of *laesio enormis*, error, or lapse of purpose by the Buyer is excluded.

## **10. Disposal of waste electrical and electronic equipment**

- 10.1. The Buyer of electrical/electronic equipment for commercial purposes, incorporated in Austria, is responsible for the financing of the collection and treatment of waste electrical and electronic equipment as defined by the Ordinance Regulating the Handling of Waste Electrical Equipment, if he is himself the user of the electrical/electronic equipment. If the Buyer is not the end user, he shall transfer the full financial commitment to his customer by agreement and furnish proof thereof to the Seller.
- 10.2. The Buyer incorporated in Austria shall ensure that the Seller is provided with all information necessary to meet the Seller's obligations as manufacturer/importer, particularly according to §§ 11 and 24 of the Ordinance Regulating the Handling of Waste Electrical Equipment and the Waste Management Act.
- 10.3. The Buyer incorporated in Austria is liable vis-à-vis the Seller for any damage and other financial disadvantages incurred by Seller due to Buyer's failure to meet or fully meet his financing commitment or any other obligations according to Article 10. The Buyer shall bear the burden of proof of performance of this obligation.

## **11. Seller's liability**

- 11.1. Outside the scope of the Product Liability Act, Seller shall be liable only if the damage in question is proved to be due to intentional acts or acts of gross negligence, within the limits of statutory provisions. Seller's total liability in cases of gross negligence is limited to the net value of the order or EUR 500,000, depending on which amount is lower.
- 11.2. For each incident of damage, Seller shall be liable for 25% of the net value of the order or EUR 125,000, depending on which amount is lower.
- 11.3. Seller shall not be liable for damage due to acts of ordinary negligence nor for consequential damages or damages for pure economic loss, indirect damages, loss of production, financing costs, costs for replacement energy, loss of energy, data or information, loss of profits, loss of savings or interest, or damage resulting from third-party claims against buyer.
- 11.4. Seller shall not be liable for damages in case of non-compliance with instructions for assembly, commissioning and operation (such as are contained in instructions for use) or non-compliance with licensing requirements.
- 11.5. Claims that exceed the contractual penalties that were agreed on are excluded from the respective title. The provisions of paragraph 11 apply exclusively for all claims by Buyer against Seller, regardless of the legal basis or entitlement, and also apply to all employees, subcontractors and subsuppliers of Seller.

## **12. Industrial property rights and copyrights**

- 12.1. Buyer shall indemnify Seller and hold him harmless against any claims for any infringement of industrial property rights raised against him if Seller manufactures an article pursuant to any design data, design drawings, models or other specifications made available to him by Buyer.
- 12.2. Design documents such as plans and drawings and other technical specifications as well as samples, catalogues, prospectuses, pictures and the like shall remain the intellectual property of Seller and are subject to the relevant statutory provisions governing reproduction, imitation, competition etc. The provisions of 2.2 above shall also cover design documents.

## **13. Compliance with export provisions**

- 13.1. When passing on goods delivered by Seller to third parties (as well as any related documentation, regardless of the method of provision or the services performed by Seller [including technical support of any kind]), Buyer must comply with the applicable regulations of national and international (re-)export provisions. In any case, Buyer must observe the (re-)export provisions of Seller's country of residence, the European Union and the United States of America.
- 13.2. If necessary for export controls, Buyer must provide Seller with all necessary information immediately after being requested to do so, for example, information about the final recipient, final destination and purpose of the goods or services.

## **14. General**

Should individual provisions of the contract or of these provisions be invalid the validity of the other provisions shall not be affected. The invalid provision shall be replaced by a valid one, which comes as close to the target goal as possible.

## **15. Jurisdiction and applicable law**


Any litigations arising under the contract including litigations over the existence or non-existence thereof shall fall within the exclusive jurisdiction of the competent court at Sellers domicile; the competent court of the Bezirksgericht Innere Stadt, Vienna, shall have exclusive jurisdiction if Seller is domiciled in Vienna. The contract is subject to Austrian law excluding the referral rules. Application of the UN Convention on Contracts for the International Sale of Goods is renounced.

## **16. Proviso**

The execution of the contract by Seller is subject to the condition that there are no obstacles standing in the way of execution due to national or international (re-)export provisions, and especially no embargos and/or other sanctions.

Last revised in September 2011

# The Future is Bright

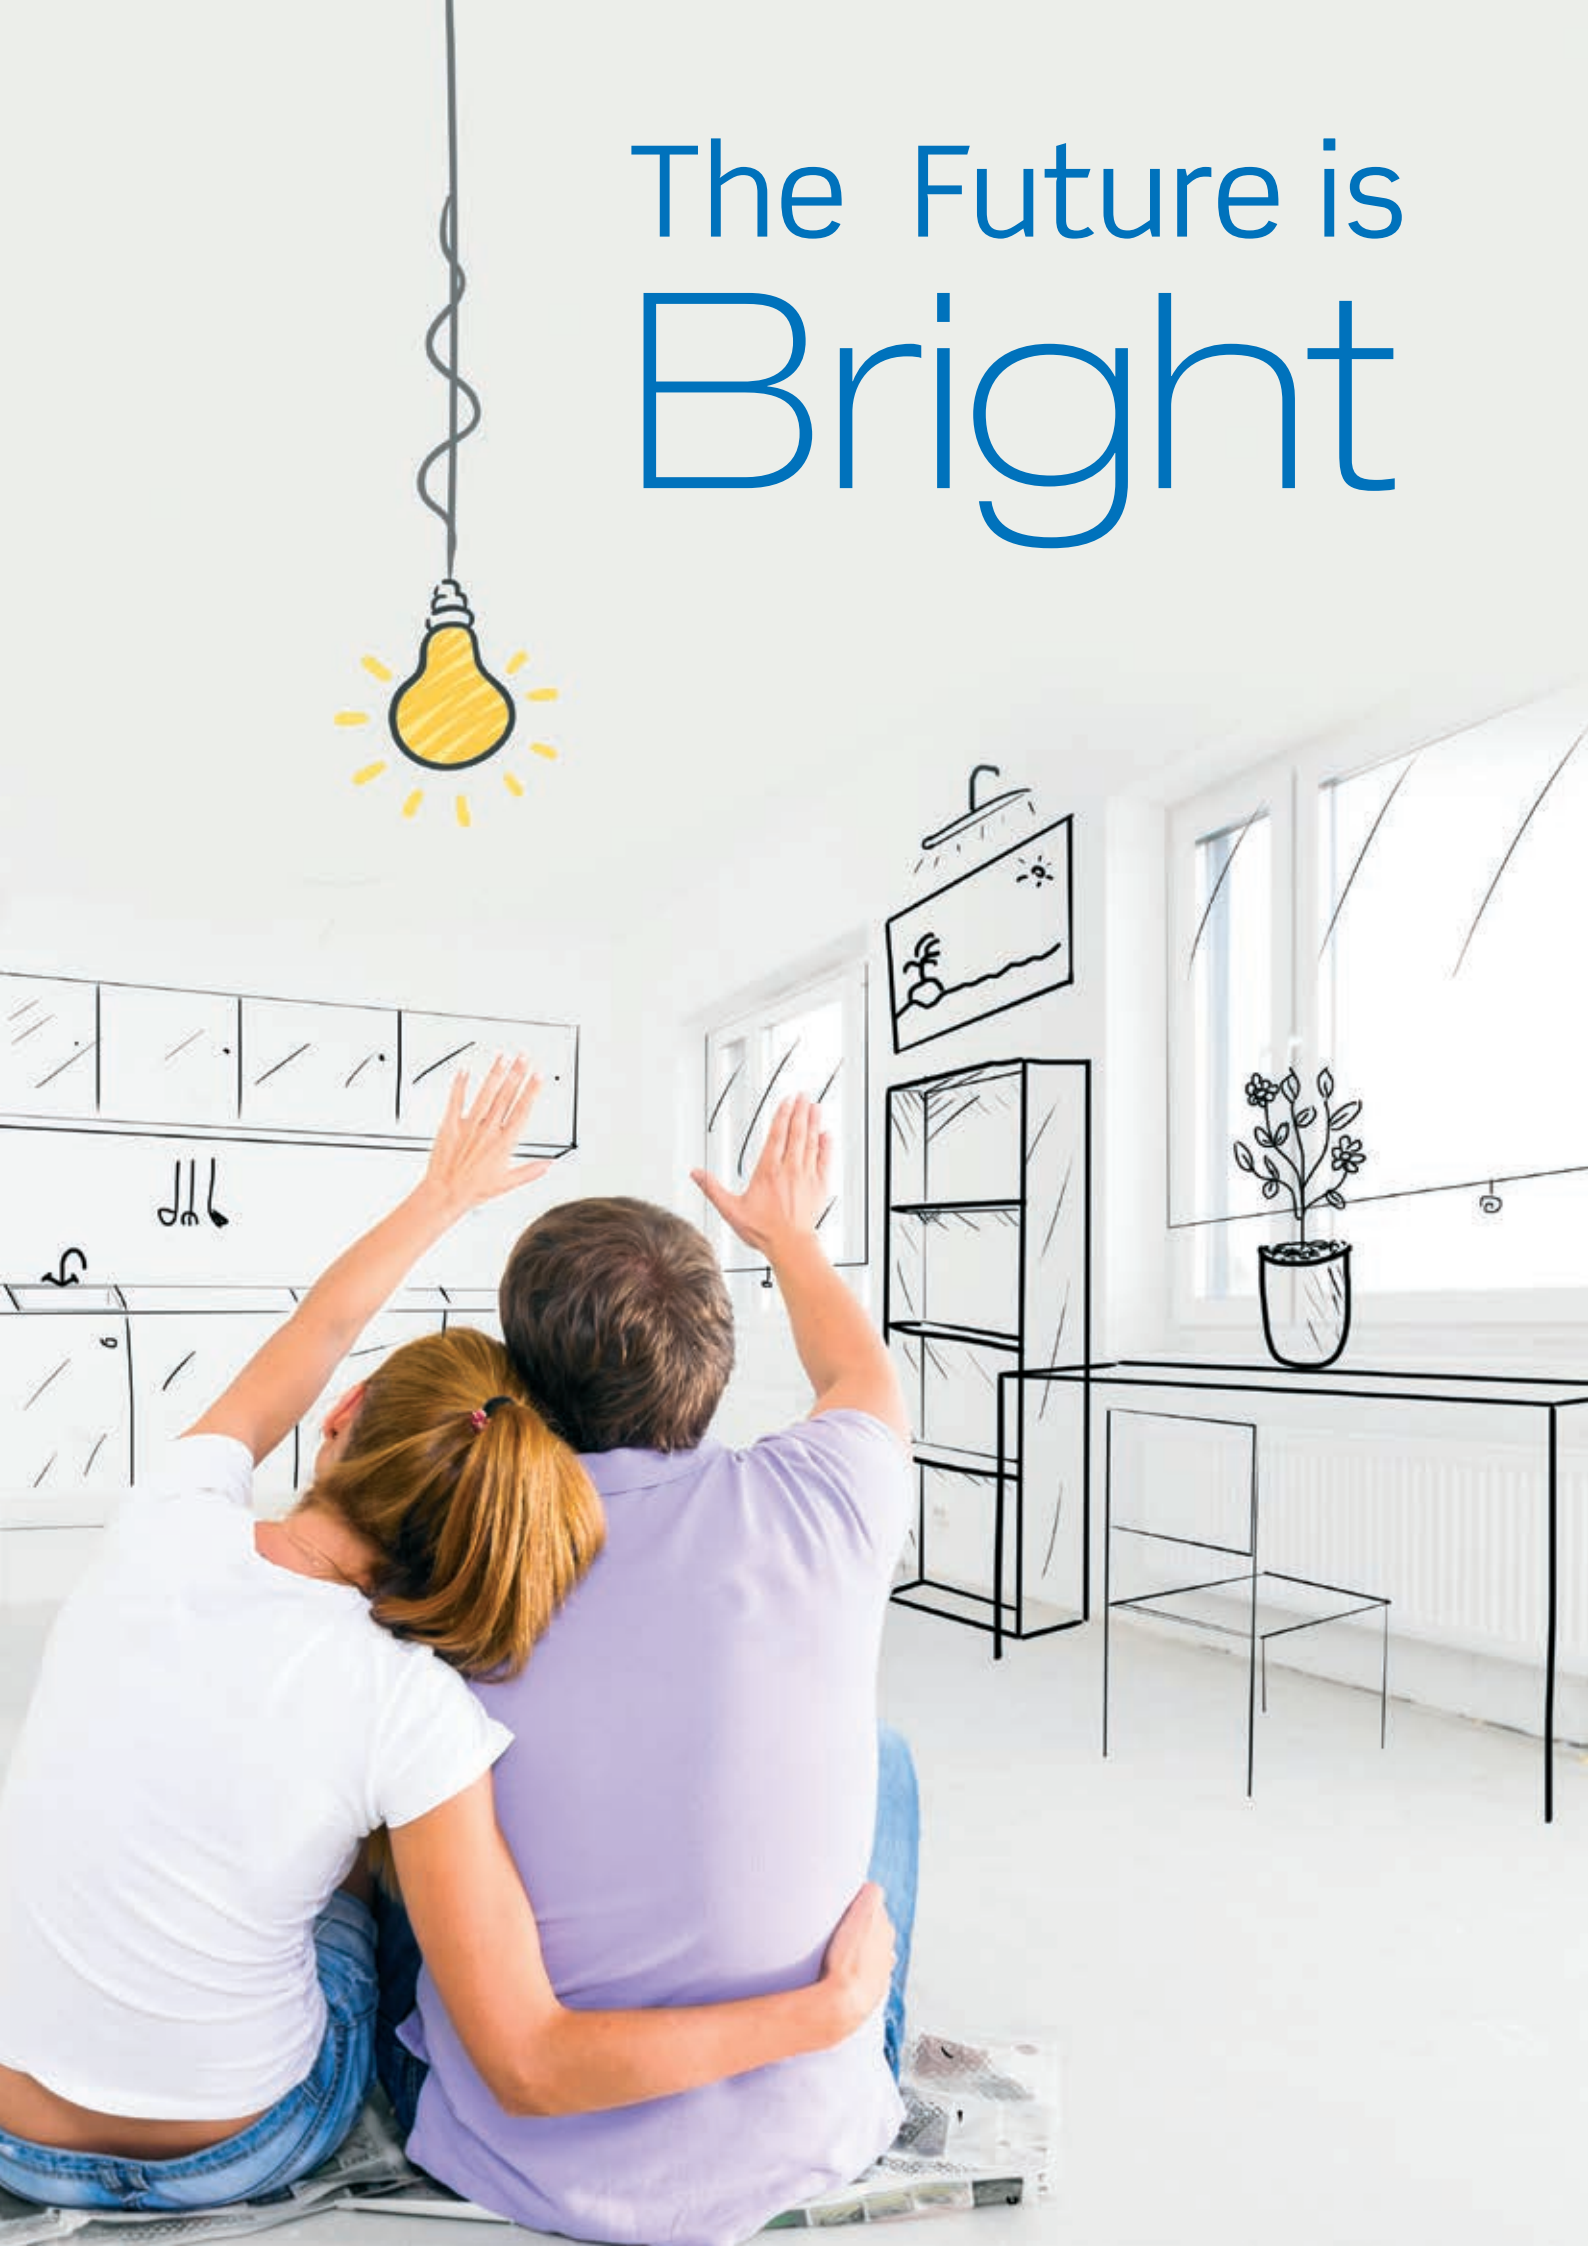

## THE COMPANY

### HEADQUARTERS

#### SCHRACK TECHNIK GMBH

Seybelgasse 13, 1230 Wien  
PHONE +43(0)1/866 85-5900  
FAX +43(0)1/866 85-98800  
E-MAIL [info@schrack.at](mailto:info@schrack.at)

### SCHRACK SUBSIDIARIES

#### BELGIUM

SCHRACK TECHNIK B.V.B.A.  
Twaalfapostelenstraat 14  
BE-9051 St-Denijs-Westrem  
PHONE +32 9/384 79 92  
FAX +32 9/384 87 69  
E-MAIL [info@schrack.be](mailto:info@schrack.be)

#### BOSNIA-HERZEGOVINA

SCHRACK TECHNIK BH D.O.O.  
Put za aluminijski kombinat bb  
BH-88000 Mostar  
PHONE +387/36 333 666  
FAX +387/36 333 667  
E-MAIL [schrack@schrack.ba](mailto:schrack@schrack.ba)

#### BULGARIA

SCHRACK TECHNIK EOOD  
Prof. Tsvetan Lazarov 162  
Druzhba - 2  
BG-1582 Sofia  
PHONE +359 2/890 79 13  
FAX +359 2/890 79 30  
E-MAIL [sofia@schrack.bg](mailto:sofia@schrack.bg)

#### CROATIA

SCHRACK TECHNIK D.O.O.  
Zavrtnica 17  
HR-10000 Zagreb  
PHONE +385 1/605 55 00  
FAX +385 1/605 55 66  
E-MAIL [schrack@schrack.hr](mailto:schrack@schrack.hr)

#### CZECH REPUBLIC

SCHRACK TECHNIK SPOL. SR.O.  
Dolnomecholupska 2  
CZ-10200 Praha 10 – Hostivar  
PHONE +42(0)2/810 08 264  
FAX +42(0)2/810 08 462  
E-MAIL [praha@schrack.cz](mailto:p Praha@schrack.cz)

#### HUNGARY

SCHRACK TECHNIK KFT.  
Vidor u. 5  
H-1172 Budapest  
PHONE +36 1/253 14 01  
FAX +36 1/253 14 91  
E-MAIL [schrack@schrack.hu](mailto:schrack@schrack.hu)

#### GERMANY

SCHRACK TECHNIK GMBH  
Thomas-Wimmer-Ring 17  
D-80539 Munich  
PHONE +49 89/999 533 900  
FAX +49 89/999 533 902  
E-MAIL [info@schrack-technik.de](mailto:info@schrack-technik.de)

#### POLAND

SCHRACK TECHNIK POLSKA  
SP.ZO.O.  
ul. Staniewicka 5  
PL-03-310 Warszawa  
PHONE +48 22/205 31 00  
FAX +48 22/205 31 01  
E-MAIL [kontakt@schrack.pl](mailto:kontakt@schrack.pl)

#### ROMANIA

SCHRACK TECHNIK SRL  
B-dul Iuliu Maniu nr 453-457, sect. 6  
RO-061101 Bucharest  
PHONE +40 21/317 02 35 42  
FAX +40 21/317 02 62  
E-MAIL [bucuresti@schrack.ro](mailto:bucuresti@schrack.ro)

#### SERBIA


SCHRACK TECHNIK D.O.O.  
Bulevar Peka Dapčevića 42  
RS-11000 Beograd  
PHONE +38 1/11 309 2600  
FAX +38 1/11 309 2620  
E-MAIL [office@schrack.rs](mailto:office@schrack.rs)

#### SLOVAKIA

SCHRACK TECHNIK S.R.O.  
Ivanská cesta 10/C  
SK-82104 Bratislava  
PHONE +42 (02)/491 081 01  
FAX +42 (02)/491 081 99  
E-MAIL [info@schrack.sk](mailto:info@schrack.sk)

#### SLOVENIA

SCHRACK TECHNIK D.O.O.  
Pameče 175  
SLO-2380 Slovenj Gradec  
PHONE +38 6/2 883 92 00  
FAX +38 6/2 884 34 71  
E-MAIL [schrack.sg@schrack.si](mailto:schrack.sg@schrack.si)



[WWW.SCHRACK.COM](http://WWW.SCHRACK.COM)